

Technical Information

SLG 700 SmartLine Guided-Wave Radar Level Specification

34-SL-03-03, December 2016



Introduction

Part of the SmartLine® family of products, the SLG 700 series level transmitters feature high performance guided wave radar level technology. They provide high accuracy, stability, and applicability suitable for a variety of level and interface applications. SmartLine SLG 700 level transmitters are ideally suited for your demanding process tank level needs.

The SmartLine Level transmitter features the same powerful features with the other transmitters in the SmartLine family including modular design, polarity insensitivity, transmitter messaging, tamper notification, and integration with Experion® PKS thus providing the highest level of compatibility assurance and integration capabilities. A new SmartLine Application and Validation Tool provides a new level of user experience and increases engineering productivity.

Best in Class Features:

- Two-wire, loop-powered 4-20 mA transmitter
- Accuracy ± 3 mm or 0.03% of measured distance whichever is greater
- Repeatability ± 1 mm
- Integral dual seal design for safety based on ANSI/NFPA 70-202 and ANSI/ISA 12.27.01
- Process Temperature range: -60 to 450C
- Process Pressure range: -1 to 400 bar
- Wetted parts include SS316L or Hastelloy-C (C-276)
- Automatic temperature compensation
- Advanced local display and local push buttons (optional)
- Polarity insensitive electrical connections
- Comprehensive on-board diagnostic capabilities
- Full compliance to SIL 2/3 requirements as a standard
- Modular design
- Dual compartment design
- 3m remote mount housing (optional)



Figure 1 - SLG 700 SmartLine Level Transmitter

Best in Class Features (continued):

- 4-20 mA, HART and Foundation Fieldbus output
- External zero, span, & configuration capability
- Maximum range: 50 m

Communications / Output Options:

- 4-20 mA DC
- HART® (version 7.0)
- FOUNDATION™ Fieldbus

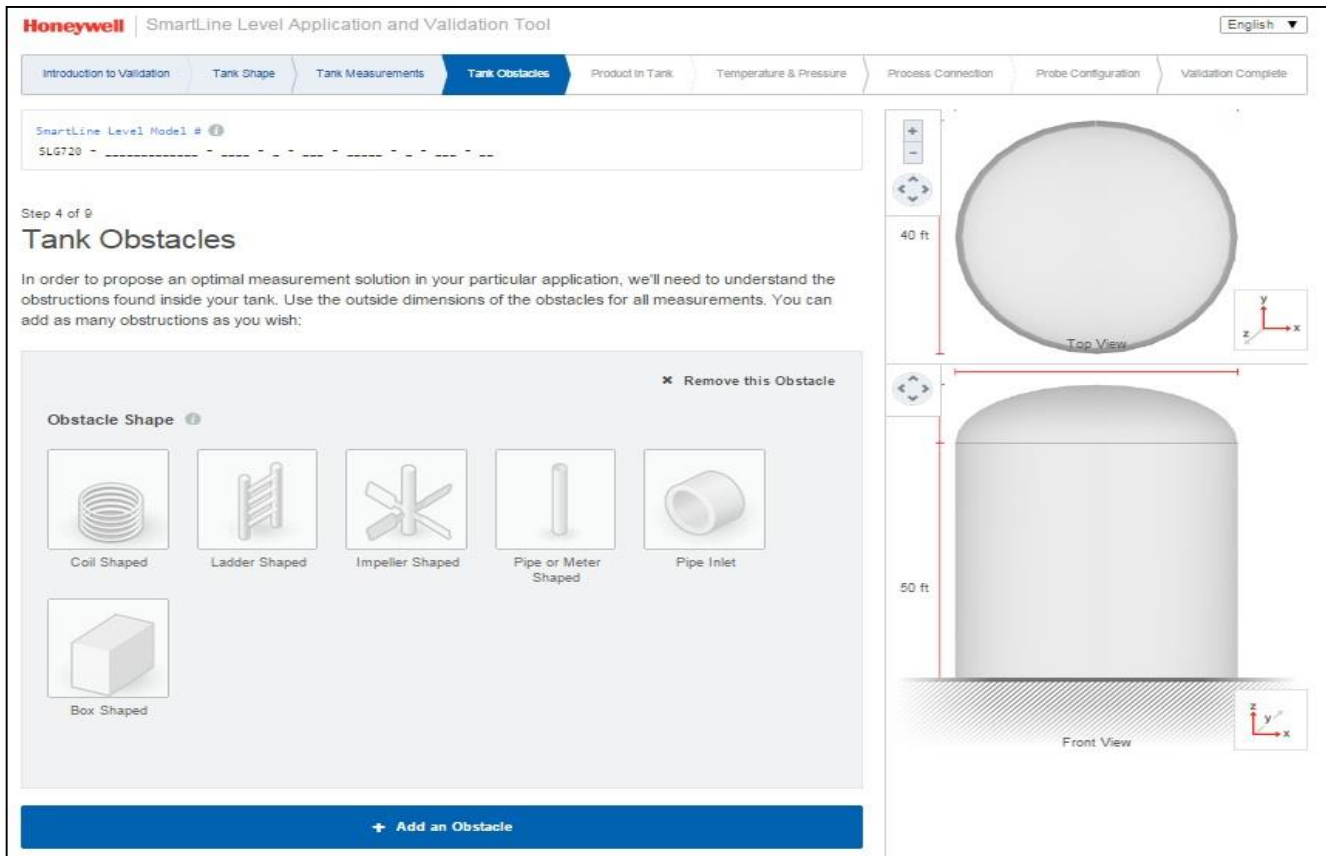


Figure 2 - Inserting tank specific details into Application and Validation Tool.

Description

The SmartLine Guided Wave Radar Level transmitter utilizes Time Domain Reflectometry (TDR) technology which is proven to be effective for a majority of level measuring applications.

Unique Out-of-the-Box, Fool Proof User Experience

The user experience of the SmartLine Level transmitter addresses one of the most common failure modes associated with specifying, ordering and implementing level transmitters, which is the specification of the correct level transmitter for the tank level application. Unique to the SmartLine Level offering is a new, online SmartLine Application and Validation Tool (AVT), which allows users to specify their tank level application and the options desired for their level transmitter. The AVT intelligently guides the user through the engineering process and electronically captures and documents the choices and inputs.

In addition to serving as engineering documentation, the AVT output also serves as input to the Honeywell order management system thus ensuring correct input of the transmitter model and the advantage of a transmitter with configuration parameters already specified to match the targeted tank application. Errors are eliminated and the engineering effort is preserved from start to finish.

The SmartLine Application and Validation Tool also allows users to collaboratively use and share the active session with any web connected colleague or expert. This interactive, collaborative capability eliminates roadblocks and delays, thus users can access resources to help start and finish the engineering task in a single effort. This online tool also dynamically reformats the user interface to correctly display on an Apple iPad®, iPhone® or Android™ device.

Unique Indication/Display Options

The SmartLine SLG series level transmitter's modular design accommodates a unique advanced graphics LCD display with many unparalleled features (as an option).



Advanced Graphics LCD Display Features

- Modular (may be added or removed in the field)
- 0, 90, 180, & 270 degree position adjustments
- Standard and custom measurement units available. (custom measurement units applicable only for FF)
- Eight display screens with 3 formats are possible
- 128 by 64 dot matrix graphics display
- Large PV, Bar graph and Trend graph format supported (for any of the 8 screens). Echo stem plots with Distance to Product and Distance to Interface
- Configurable screen rotation timing
- The Display supports English, German, French, Spanish, Italian, Turkish, Russian, Chinese and Japanese

Diagnostics

SmartLine transmitters all offer digitally accessible diagnostics which aid in providing advanced warning of possible failure events minimizing unplanned shutdowns, providing **lower overall operational costs**

System Integration

- SmartLine communications protocols all meet the most current published standards for HART or FOUNDATION Fieldbus.
- Integration with Honeywell's Experion PKS offers the following unique advantages.
 - Transmitter messaging
 - Maintenance mode indication
 - Tamper reporting
 - FDM Plant Area Views with Health summaries
 - The SLG series is Experion tested to provide the highest level of compatibility assurance.

Modular Design

To help contain maintenance and inventory costs, all SLG series transmitters are modular in design supporting the user's ability to change electronic modules without affecting overall performance. Electronic modules may be swapped with another electronics module without losing in-tolerance performance characteristics.

Modular Features

- Exchange / replace all electronic modules
- Add or remove lightning protection (terminal module)

With no performance effects, Honeywell's unique modularity results in **lower inventory needs and lower overall operating costs.**

Configuration Tools

Integral Three Button Configuration Option

Suitable for all electrical and environmental requirements, SmartLine offers the ability to configure the transmitter and display via three externally accessible buttons. Zero or span capabilities are also optionally available via these buttons, without selection of a display option.

Hand Held Configuration

SmartLine transmitters feature two-way communication and configuration capability between the operator and the transmitter. This is accomplished via Honeywell's field-rated Multiple Communication Configurator (MCT404).

The MCT202 and 404 are capable of field configuring DE and HART Devices and can also be ordered for use in intrinsically safe environments. All Honeywell transmitters are designed and tested for compliance with the offered communication protocols and are designed to operate with any properly validated hand held configuration device.

Field Service Tool – DTM based technology

SmartLine Level utilizes the standard unified DTM technology to access device parameters but utilizes its fullest potential in the creation of our new Field Service Tool. Using a commonly available DTM container, the SmartLine Level Field Service Tool provides both a novice mode and an expert user mode. Novice users are offered a guided experience to setup the device parameters while expert users can easily access the parameters desired through the organized parameter pages. The DTM runs on any PC and avoids the need for a handheld configurator.

Personal Computer Configuration

Honeywell's Field Device Manager (FDM) Software and FDM Express are available for managing HART & FOUNDATION Fieldbus device configurations.

General Specifications

Parameter	Description		
Measurable media	Liquids		
Measurements performed	Level, volume, interface		
Process Storage Tank types	Vertical and horizontal cylinders, rectangular tanks, spheres, stilling / bypass wells		
SIL certification	SIL 2/3		
Maximum Measuring range	Liquids	50 m (164 ft)	
Available probe types	Rod, wire, coax		
Wetted materials	SLG 720: SS 316L, C-276, PTFE, Duplex (wetted) SLG 726: SS316L, Alumina, Glass (Borofloat 33 [®]), PEEK (GF30), Gold, Viton		
O-Ring Seal Materials Please see Figure 8 and Figure 9	Material	Min Temp	Max Temp
	Viton [®] or Fluorocarbon	-26 degC	200 deg C
	Ethylene Propylene (EPDM)	-40 degC	150 deg C
	Kalrez 6375 perfluorelastomer	-20 degC	200 degC (sat steam max 150 degC)
	Buna-N	-40 degC	120 degC
	Metallic - 17-4 PH, Silver plated	-60 degC	450 degC
	Metallic - Alloy 718 NACE, Gold plated	-60 degC	450 degC
Electronic Housing	Pure polyester powder-coated low copper (<0.6%) aluminum Meets NEMA 4X, IP66, IP67 All stainless steel housing and remote electronics (with 3 m cable) are optional		
User Interface	3 button keypad		
Display	128 x 64 pixels LCD		
Output Units	Level: ft, in, m, cm, or mm Volume: ft ³ , in ³ , US gal, Imp gal, barrels, yd ³ , m ³ , liters Rate: ft/s, m/s, in/min, m/h, ft/min, in/sec		
Output Process Variables	<ul style="list-style-type: none"> • Level • Percentage Level • Distance to Level • Level Rate • Volume • Vapor (Ullage) Thickness • Vapor (Ullage) Thickness % • Vapor (Ullage) Volume • Distance to Interface • Interface Level • Interface Level Rate • Upper Layer Thickness • % Interface Level • Lower Volume • Upper Volume 		
Language	English, German, Italian, French, Spanish, Russian, Turkish, Chinese and Japanese		
Wiring Entry	SLG 700 series: ½ -inch NPT(female), M20 (female)		
Wiring	Accepts up to 16 AWG (1.5 mm diameter).		
Mounting	Available with compact housing or remote mount housing option		
Dimensions	See page 22 for dimensional drawings.		
Net Weight	SLG 700 series: 3.2 kilograms (7 lbs) for aluminum housing		

Operating Conditions – All Models


Parameter	Rated Condition		Operative Limits		Transportation and Storage		
	°C	°F	°C	°F	°C	°F	
Ambient Temperature ¹	-40 to 85	-40 to 185	-40 to 85	-40 to 185	-55 to 120	-67 to 248	
Process Connector ²	SLG 720	-40 to 200	-40 to 392	-40 to 200	-40 to 392	-55 to 125	-67 to 257
	SLG 726	-60 to 450	-76 to 842	-60 to 450	-76 to 842	-55 to 125	-67 to 257
Humidity %RH	0 to 100		0 to 100		0 to 100		
Maximum Allowable Working Pressure (MAWP) ^{3, 4}	SLG720: 40 bar (580 psi) SLG726: 400 bar (5800 psi) "See Figure 10 and Figure 11						
Supply Voltage and Load Resistance (HART)	Voltage at transmitter terminals is 14.0 to 42.0 Vdc (IS versions limited to 30 Vdc) 0 to 1284 ohms (as shown in Figure 3). A minimum of 250ohms is required to support HART communications.						
Supply Voltage (FOUNDATION Fieldbus)	Voltage at transmitter terminals is 9.0 to 32.0 Vdc (IS versions limited to 30 Vdc, FISCO limited to 17.5 Vdc)						

¹ LCD Display operating temperature -20°C to +70°C . Storage temperature -30°C to 80°C.

² Rated condition and operative limit temperatures subject to O-Ring selection and ambient temperature conditions. See **Error! Reference source not found.** or details.

³ Units can withstand overpressure of 1.5 x MAWP without damage

⁴ Consult factory for MAWP of SLG 700 transmitter with CRN approval

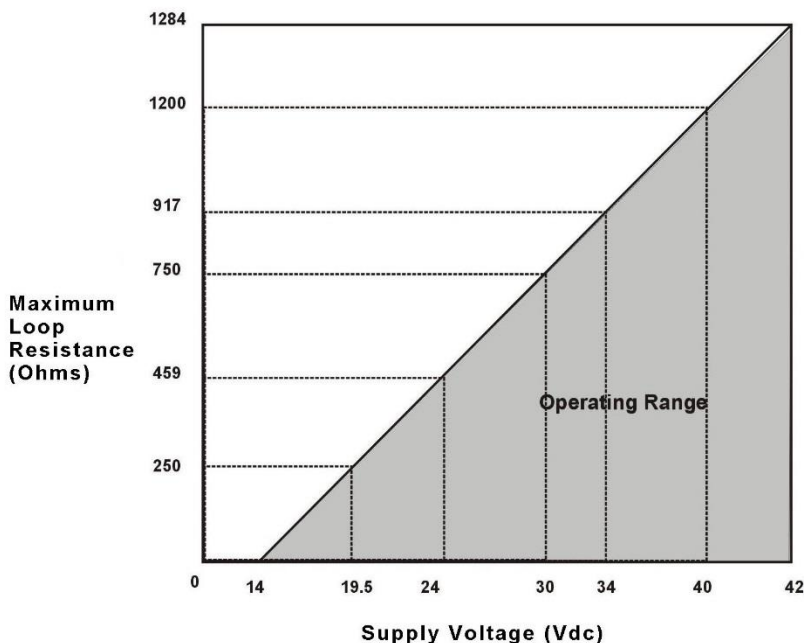

Note: A minimum of 250ohms of loop resistance is required to support communications.

Loop resistance = Barrier resistance + Wire resistance + Receiver resistance

Supply Voltage (Vdc)	Max. Loop Resistance (Ohms)
14	0
19.5	250
24	459
30	750
34	917
40	1200
42	1284

Figure 3 – Operating Voltage (Supply voltage) and maximum allowable loop resistance (not applicable for Fieldbus)

R_{LOOP MAX} = maximum loop resistance (including safety barriers and wiring) that will allow proper Transmitter operation and is calculated as

$$R_{LOOP MAX} = (V_{SUPPLY MIN} - V_{XMTR MIN}) \div 21.8 \text{ mA.}$$

Where: V_{XMTR MIN} = 14V (Minimum Voltage at the terminals)

Performance Under Rated Conditions – All Models

Parameter	Description												
Measuring principle	Time Domain Reflectometry (TDR)												
Analog Output Digital Communications:	Two-wire, 4 to 20 mA (HART transmitters only) HART 7 protocol or FOUNDATION Fieldbus ITK 6.0.1 compliant All transmitters, irrespective of protocol have polarity insensitive connection.												
Output Failure Modes	<table border="0"> <thead> <tr> <th colspan="2">Honeywell Standard:</th> <th>NAMUR NE 43</th> </tr> </thead> <tbody> <tr> <td>Compliance:</td> <td></td> <td></td> </tr> <tr> <td>Normal Limits:</td> <td>3.8 – 20.8 mA</td> <td>3.8 – 20.5 mA</td> </tr> <tr> <td>Failure Mode:</td> <td>≤ 3.6 mA and ≥ 21.0 mA</td> <td>≤ 3.6 mA and ≥ 21.0 mA</td> </tr> </tbody> </table>	Honeywell Standard:		NAMUR NE 43	Compliance:			Normal Limits:	3.8 – 20.8 mA	3.8 – 20.5 mA	Failure Mode:	≤ 3.6 mA and ≥ 21.0 mA	≤ 3.6 mA and ≥ 21.0 mA
Honeywell Standard:		NAMUR NE 43											
Compliance:													
Normal Limits:	3.8 – 20.8 mA	3.8 – 20.5 mA											
Failure Mode:	≤ 3.6 mA and ≥ 21.0 mA	≤ 3.6 mA and ≥ 21.0 mA											
Maximum Range	50 m (164 feet)												
Resolution	±1 mm (0.04 inch)												
Accuracy Reference conditions are given in the table below	<table border="0"> <thead> <tr> <th>Rod/Coax</th> <th>± 3mm</th> </tr> </thead> <tbody> <tr> <td>Wire</td> <td>0.03% of range or ± 3mm (whichever is greater)</td> </tr> </tbody> </table>	Rod/Coax	± 3mm	Wire	0.03% of range or ± 3mm (whichever is greater)								
Rod/Coax	± 3mm												
Wire	0.03% of range or ± 3mm (whichever is greater)												
Ambient temperature Effect	±0.2mm/degree K or ±15 ppm/Deg K of measured value whichever is greater												
Repeatability	±1 mm (0.04 inch)												
Dielectric constant (minimum)	1.4												
Damping Time Constant	HART: Adjustable from 0 to 60 seconds in 0.1 increments. Default Value: 2 seconds												
Electromagnetic Compatibility	IEC61326 (All transmitters) *, NAMUR NE21 (HART & 4-20mA)												
Lightning Protection Option	Leakage Current: 10 uA max @ 42.0 VDC 93C Impulse rating: <table border="0"> <tr> <td>8/20 uS</td> <td>5000 A (>10 strikes)</td> <td>10000 A (1 strike min.)</td> </tr> <tr> <td>10/1000 uS</td> <td>200 A (> 300 strikes)</td> <td></td> </tr> </table>	8/20 uS	5000 A (>10 strikes)	10000 A (1 strike min.)	10/1000 uS	200 A (> 300 strikes)							
8/20 uS	5000 A (>10 strikes)	10000 A (1 strike min.)											
10/1000 uS	200 A (> 300 strikes)												

NOTE: The SLG 700 transmitter complies with the radiated immunity requirements when a coax probe is used AND/OR with any probe when the device is installed in a metallic vessel or stillwell. When the device is installed on an open-air tank or non-metallic tank the electromagnetic emissions levels will remain compliant with any probe, however, a coax probe is recommended if a strong electromagnetic field may be present near the probe.

Reference Conditions

Parameter	Unit	Reference Condition
Ambient Temperature	°C	25 ± 1
Process Temperature	°C	25 ± 1
Humidity	% RH	0 - 85
Flange diameter for rod, wire configurations	mm	>300
Reference product in the tank	Single Two (non-flooded)	NA NA
		Air / Water Air / Oil (DC=2) / Water
Minimum distance to walls and obstacles	mm	400
Process pressure	kPa	100 ± 10

Table 1 - Sensor Details

Parameter	Description		
Probe	Type	Min/ Max length	Materials
	Rod	0.4m (1.3 ft) / 6.3m (20.7 ft)	SS 316L, C-276*
	Wire	1.0m (3.3 ft) / 50m (164 ft)	SS 316
	Coax	0.4m (1.3 ft) / 6.3m (20.7 ft)	SS 316L, C-276*

*Only for model SLG720

Table 2 - Minimum blocking distances and transition zones for the various probe types

Probe Type	Media in Tank	Minimum Blocking Distance High [cm]	Upper Transition Zone, T _{up} [cm]	Minimum Blocking Distance Low [cm]	Lower Transition Zone, T _{low} [cm]
Rod/Wire	Water (DC=80)	9	13	0	1
Rod/Wire	Oil (DC=2)	7	14	0	12
Coax	Water (DC=80)	5	14	2	0
Coax	Oil (DC=2)	5	8	6	7

Table 3 - Maximum measurement range versus Dielectric Constant

Wire Probe		Rod/Coax Probe	
Min DC	Range (m)	Min DC	Range (m)
1.4	15	1.4	6.3
1.8	25		
3	42		
4	46		
6	50		

Accuracy and measurement range detailed specification

The available probe lengths for each probe type are summarized in [Table 1 - Sensor Details](#)

These accuracy specifications are defined under reference conditions, at other ambient temperatures the accuracy specifications are increased by $\pm 0.15 \text{ mm}/^\circ\text{C}$ or $\pm 30 \text{ ppm}/^\circ\text{C}$ whichever is greater.

The measurement accuracy over the probe length is the larger of $\pm 3\text{mm}$ or $\pm 0.03\%$ of probe length. At the top and bottom of the probe the measurement performance can deviate from the $\pm 3\text{mm}$ or $\pm 0.03\%$ accuracy specification. The zones at the top and the bottom of the probe at which the accuracy deviates from the accuracy spec is called upper and lower transition zones respectively. As the level rises or falls in the upper and lower transition zone a point may be reached where the transmitter cannot provide a level reading or the accuracy is worse than $\pm 30\text{mm}$, at this point we have reached the minimum blocking distance that can be set in the transmitter.

Figures 4, 5, 6 & 7 summarize the accuracy as a function of length for the available probe types in addition Table 3-4 provides a tabular summary of the minimum blocking distances and the transition zones. In order to meet the accuracy specifications near the end of the probe (lower transition zone and minimum blocking distance low), the correct probe type and probe length need to be configured.

Note that for a wire probe with an end weight or with a looped end the minimum blocking distance low is measured from the top of the weight or the top of the loop's crimp.

When the transmitter is installed in a nozzle then the distances are measured from the bottom on the nozzle, i.e. where the nozzle transitions to the tank. In addition when using a nozzle the guidance provided in Nozzle mount section, later in this spec, needs to be followed.

For the following four figures in this section, T_{up} and T_{low} are upper and lower transition zones respectively.

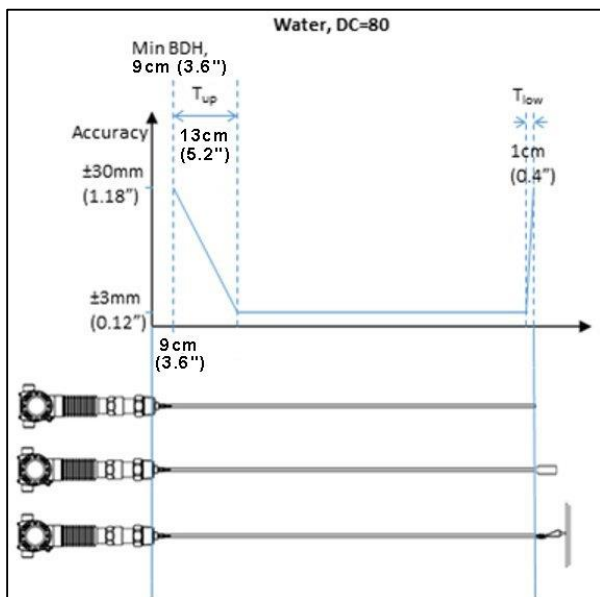


Figure 4 - Transition zone lengths and minimum blocking distance high (BDH) for single lead probes in water.

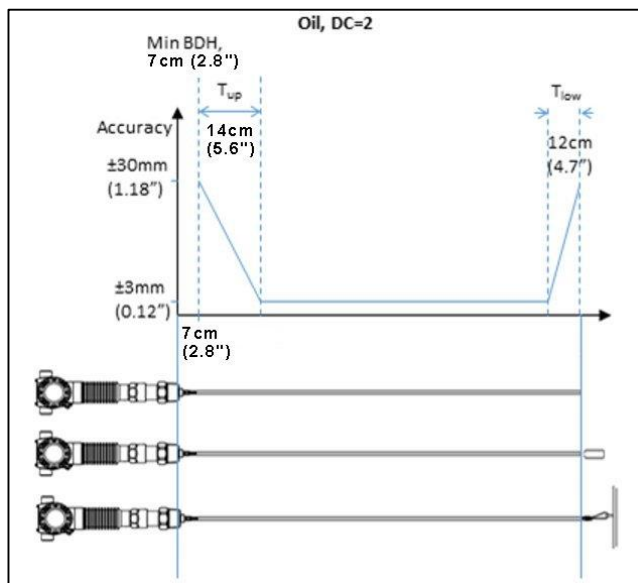


Figure 5 - Transition zone lengths and minimum blocking distance high (BDH) for single lead (i.e. rod and rope) probes in oil.

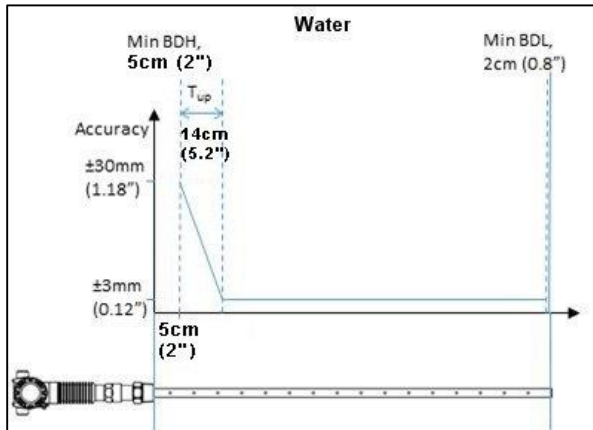


Figure 6 - Upper transition zone length and minimum blocking distance high (BDH) and minimum blocking distance low (BDL) for coax probes in water

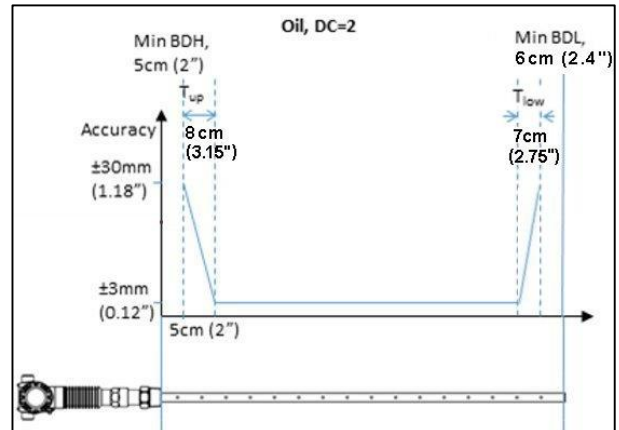


Figure 7 - Upper transition zone length and minimum blocking distance high (BDH) and minimum blocking distance low (BDL) for coax probes in oil.

Interface accuracy and range

When measuring interface the accuracy of both the surface and interface level is $\pm 3\text{mm}$ and the minimum interface thickness that can be measured is 7cm. However, restrictions exist for interface measurements depending on the application and on the dielectric constant (DC) of the measured products:

- * Maximum dielectric constant of the upper medium: 9
- * Minimum dielectric constant of the lower medium: 10
- * Minimum difference in dielectric constant between the upper and lower medium: 8
- * Minimum upper product thickness: 7cm

In addition, the maximum upper product thickness that can be measured will be restricted by the measured products. In the case of low absorption by the upper medium, upper product thicknesses of greater than 30 meters can be measured. In contrast, in strongly absorbing upper media, only upper product thicknesses of less than a couple of meters can be measured. In general, absorption will tend to be higher in media with higher dielectric constant. Therefore the measurable thickness range of the upper product will be lower with higher upper product dielectric constant applications (DCU >3 or 4).

When the upper product thickness drops below 15cm approximately, the surface and interface reflections start to overlap. The transmitter will continue to measure the upper product thickness accurately down to 7cm in spite of the fact that the echo curve might only show one reflection for both surface and interface. If the transmitter fails to measure upper product thicknesses below 15cm or if the measurement of thin interfaces is inaccurate, it might be necessary to adjust the reflection models using the Honeywell DTM. Refer to the *SLG 700 HART Option manual, #34-SL-25-06* for details on adjusting model parameters.

Note: The level transmitter is designed to measure properly only when the upper product thickness is greater or equal to 7cm. For example, upon restart the transmitter will not attempt to provide a surface and interface measurement if the upper product thickness is less than 7cm.

Note: If the surface level is never going to exceed the minimum blocking distance high (min BDH) for the transmitter configuration, it is recommended to keep full tank detection option off.

Centering Disk

Parameter	Description		
Centering Disk	Type	Min/ Max diameter	Materials
	Rod and Wire	5.08 cm (2 in) / 20.32 cm (8 in)	SS 316L, C-276

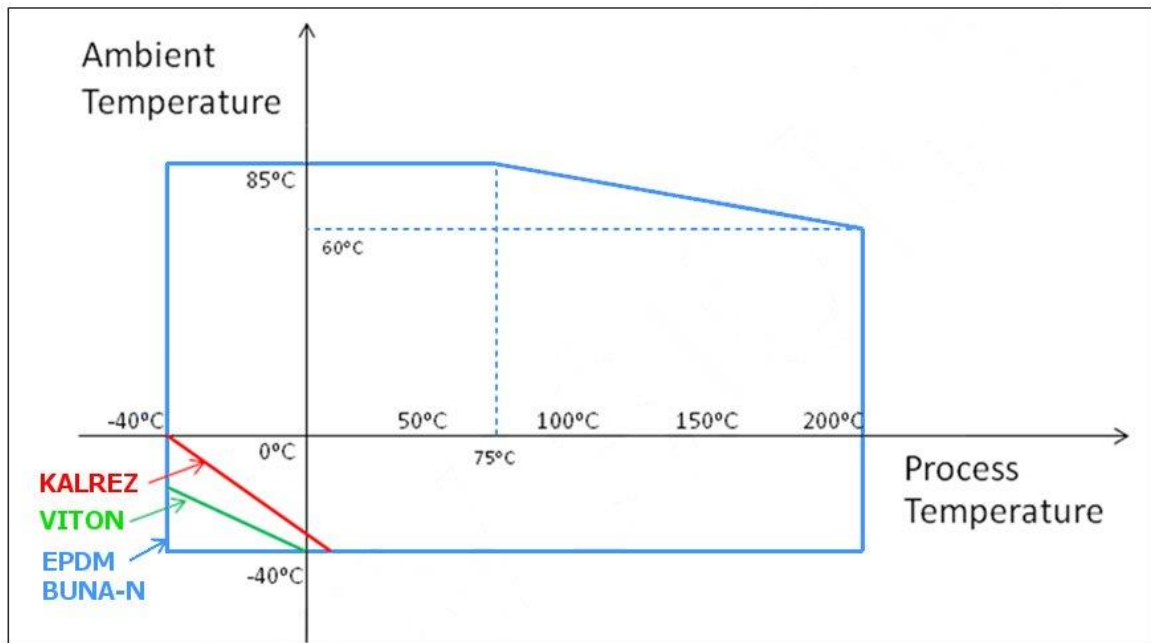


Figure 8 - Transmitter O-Ring Seal Material Temperature Applicability SLG720

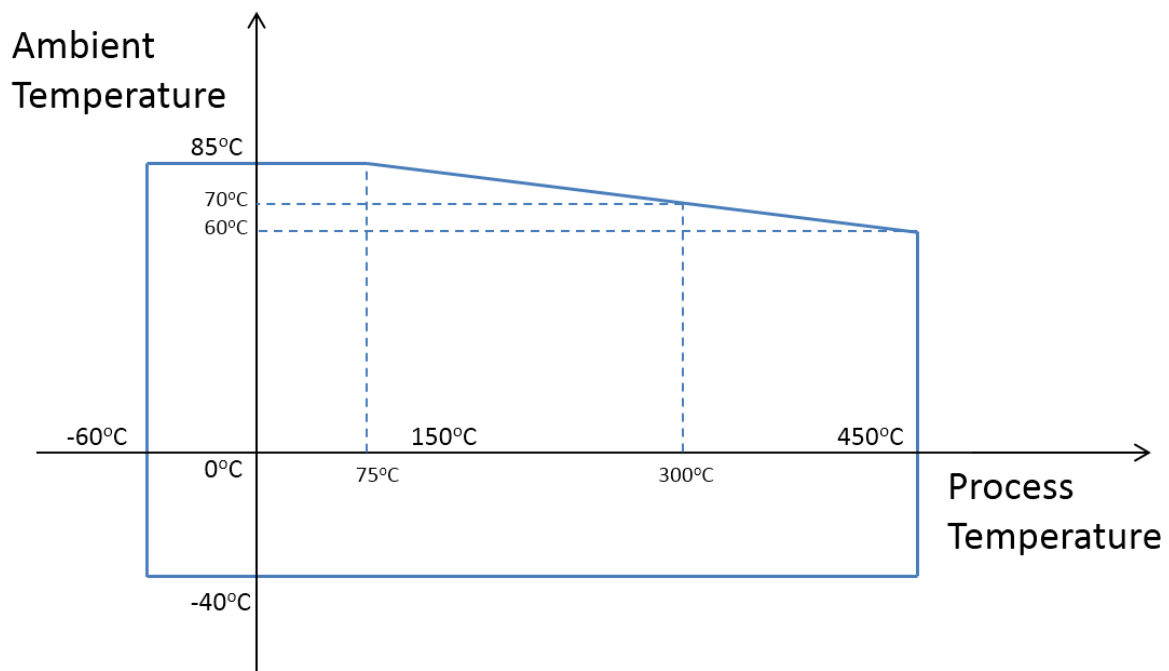


Figure 9 - SLG 726 Temperature Limits

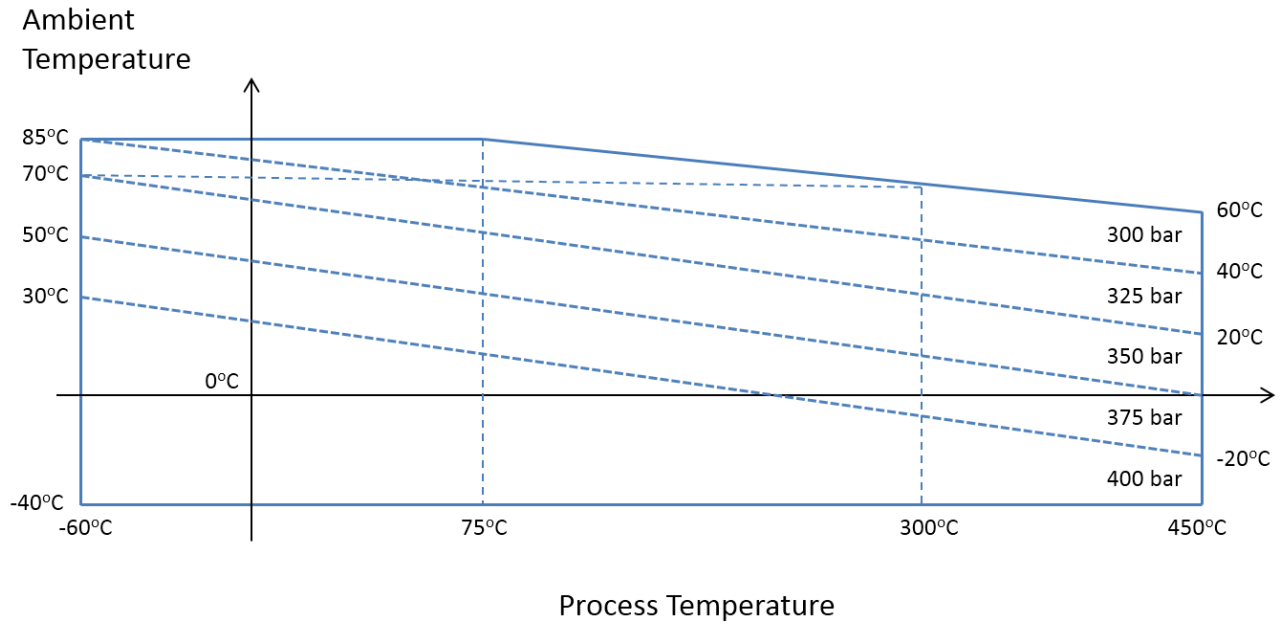


Figure 10 - SLG 726 Maximum Pressure based on Maximum Temperature

MAX PRESSURE [bar]		AMBIENT TEMPERATURE [°C]														
		-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	85	
PROCESS TEMPERATURE [°C]	-60	400	400	400	400	400	400	400	400	400	375	375	350	350	325	325
	-50	400	400	400	400	400	400	400	400	400	375	375	350	350	325	325
	0	400	400	400	400	400	400	400	375	375	350	350	325	325	300	300
	50	400	400	400	400	400	400	400	375	375	350	350	325	300	300	-
	100	400	400	400	400	400	400	375	375	350	350	325	325	300	-	-
	150	400	400	400	400	400	400	375	375	350	350	325	325	300	-	-
	200	400	400	400	400	400	375	375	350	350	325	325	300	-	-	-
	250	400	400	400	400	400	375	375	350	350	325	325	300	-	-	-
	300	400	400	400	400	375	375	350	350	325	325	300	300	-	-	-
	350	400	400	400	400	375	375	350	350	325	325	300	-	-	-	-
	400	400	400	400	375	375	350	350	325	325	300	300	-	-	-	-
	450	400	400	400	375	375	350	350	325	325	300	300	-	-	-	-
INTRINSICALLY SAFE (IS)													NON-(IS)			

Figure 11 - SLG 726 Maximum pressure based on maximum operating temperature in tabular form

Communications Protocols & Diagnostics

HART Protocol

Version: HART 7

Power Supply

Voltage: 14.0 to 42.0 Vdc at terminals

Load: Maximum 1284 ohms. See Operating Conditions – All Models table, Figure 3.

Minimum Load: 0 ohms. (For HART communications a minimum load of 250 ohms is required)

FOUNDATION Fieldbus (FF)

Power Supply Requirements

Voltage: 9.0 to 32.0 Vdc at terminals

Steady State Current: 19.6 mAdc

Software Download Current: 29.4 mAdc

Block Type	Qty	Execution Time
Resource	1P	NA/a
Level Transducer	1P	NA
Level Auxillary Transducer	1P	NA
Diagnostic	1P	NA
LCD Display	1P	NA
Analog Input	1P 5I	30 ms
PID w/Autotune	1P 1I	45 ms
Arithmetic	1P 1I	30 ms
Input Selector	1P 1I	30 ms

P = Permanent Block

I = Instantiable Block

All available function blocks adhere to FOUNDATION Fieldbus standards. PID blocks support ideal & robust PID algorithms with full implementation of Auto-tuning.

Link Active Scheduler

Transmitters can perform as a backup Link Active Scheduler and take over when the host is disconnected. Acting as a LAS, the device ensures scheduled data transfers typically used for the regular, cyclic transfer of control loop data between devices on the Fieldbus.

Number of Devices/Segment

Entity IS model: 6 devices / segment

Schedule Entries

45 maximum schedule entries

50 maximum Links

Number of VCRs: 50 max

Compliance Testing: Tested according to ITK 6.1.2

Software Download

Utilizes Class-3 of the Common Software Download procedure as per FF-883 which allows the field devices of any manufacturer to receive software upgrades from any host.

Standard Diagnostics

SLG 700 series top level diagnostics are reported as either critical or non-critical and readable via DD or DTM tools or integral display.

Other Certification Options

See Approval Certifications Table for details on page 12.

Materials

- NACE MRO175, MRO103, ISO15156
- Hazardous Location certifications for Explosion Proof, Intrinsically Safe, Non-Incendive, Dust Ignition Proof, and FISCO:
 - CSA (Canada and USA, cCSAus)
 - FM
 - ATEX
 - IECEx
 - SAEEx
 - NEPSI
 - CCoE
 - KOSHA
 - INMETRO
 - EAC TR-CU
- CE Mark and Pressure Equipment Directive (PED)
- Dual Seal in Accordance with ANSI/ISA-12.27.01
- Marked on FM and CSA approved units
- Overfill protection (WHG)
- CRN Registration
- SIL 2/3 Level Compliance
- Positive Material Identification (PMI)
- China Pattern Approval

Mounting recommendations

Suitable mounting position

To minimize signal interference observe the minimum distances in [Table 4](#). Examples of obstacles to avoid are protruding welds, internal installations, agitators, pipes and nozzles extending into the container, heating coils, inlet streams, ladders, etc. Metallic objects are a source of bigger interferences than non-metallic objects.

Turbulent applications may require the probe to be anchored to prevent it from contacting or getting too close to container walls or obstacles.

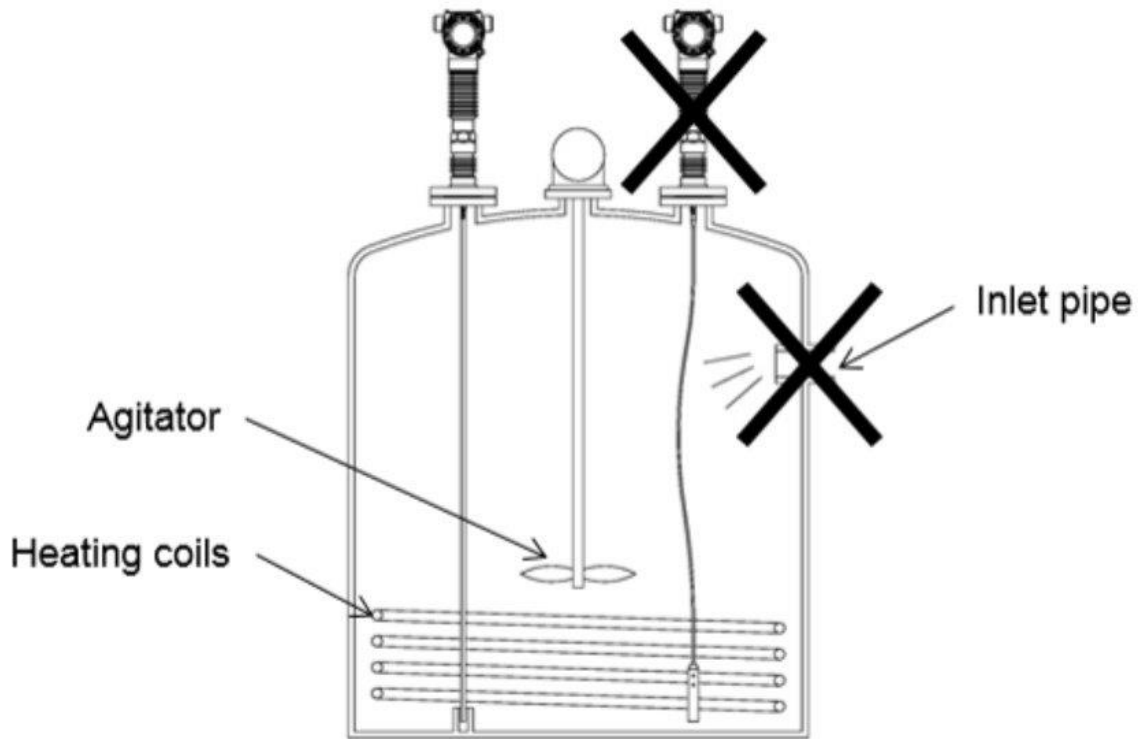


Figure 12 - Mounting position

Table 4 - Minimum recommended distance to container wall and obstacles (mm)

Probe	Minimum distance to obstacle	Minimum distance to smooth metallic container wall	Minimum distance to non-metallic container wall
Single wire	400mm (20")	100mm (4")	500mm (20")
Single rod	400mm (20")	100mm (4")	500mm (20")
Coax	0mm (0")	0mm (0")	0mm (0")

Nozzle mount

The transmitter can be mounted to a tank nozzle using the appropriate flange.

Table 5 shows recommended nozzle dimensions based on probe type.

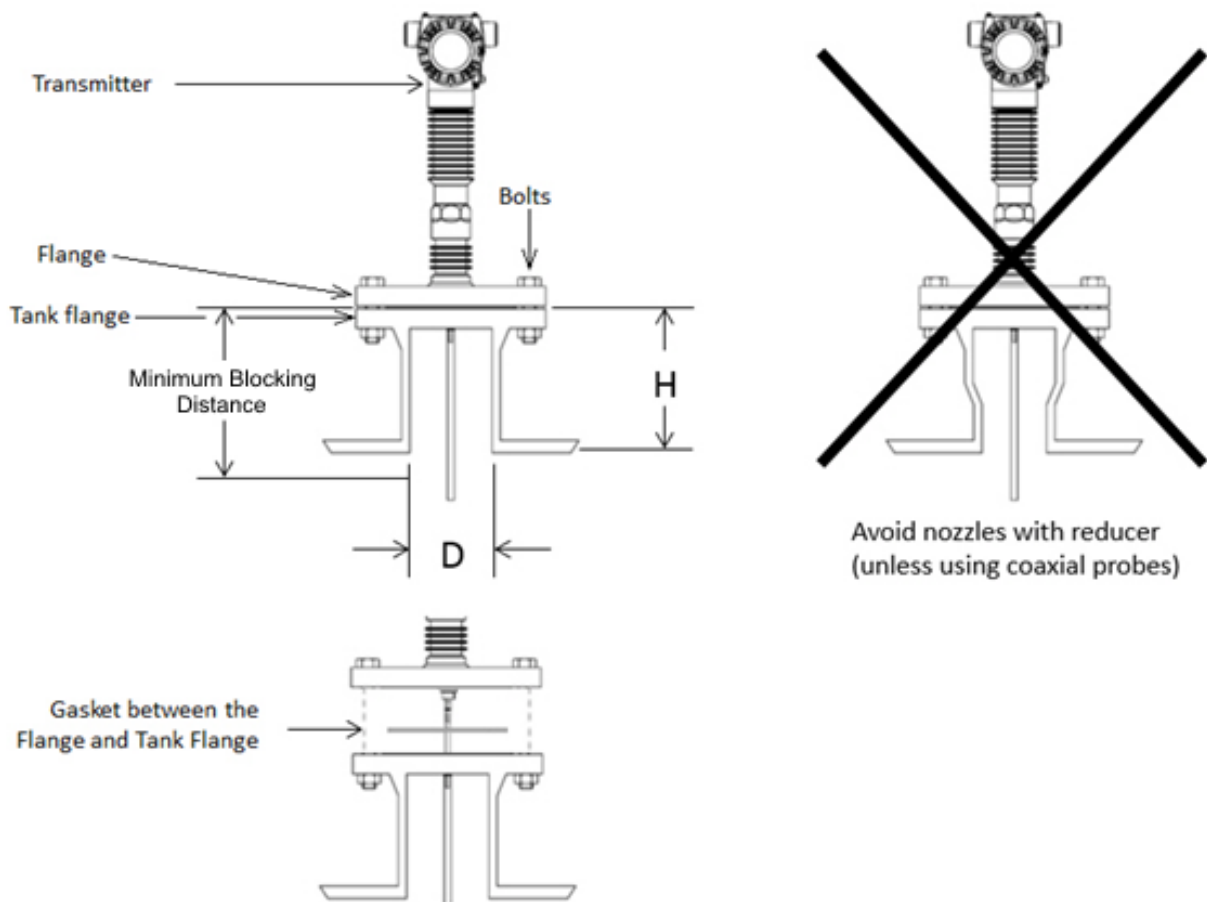


Figure 13 - Flange mounting

Table 5- SLG720: Recommended nozzle dimensions

	Single probe (rod/wire)	Coaxial probe
Recommended nozzle diameter (D)	6" (150mm)	> probe diameter
Minimum nozzle diameter (D)	2" (50mm)	> probe diameter
Recommended nozzle height (H)	4" (100mm) + nozzle diameter (*)	N/A

(*) When using a flexible probe in nozzles taller than 6" (150mm) the SWB wire probe with extension stud is recommended. SWB is an option in the model selection guide. It offers a 300mm rod extension to keep the selection of the wire probe that is in the nozzle, from moving.

In certain applications taller nozzles may be accommodated but near zone performance at the exit of the nozzle may be reduced. For nozzle dimensions that do not meet the requirements outlined in

Table 5 contact the Honeywell Technical Assistance Centre.

Area	Organization	Phone Number
United States and Canada	Honeywell Inc.	1-800-343-0228 Customer Service 1-800-423-9883 Global Technical Support
Global Email Support	Honeywell Process Solutions	ask-ssc@honeywell.com

Nozzle mount (continued ..)

For single lead probes, avoid 250mm/DN250 or larger diameter nozzles, particularly when measuring low dielectric constant materials. The user will need to install a smaller inner nozzle when operation with these larger nozzle diameter required, see Figure 14 for inner nozzle design requirements.

For supported nozzles, the minimum upper blocking distance and transition zone distance must be increased by the height of the nozzle. Additionally, in order to achieve the minimum upper blocking distance as well as meet the accuracy specification in the upper transition zone, a field background must be performed.

Nozzles \geq 250mm / DN250

Where an 8" nozzle (or greater) is the only installation option, use Figure 15 as a guideline.

1. Nozzle lower edge
2. Plate approximately flush with lower edge of the nozzle
3. Plate
4. Pipe diameter 150mm (6"). Where 1 = 8" diameter

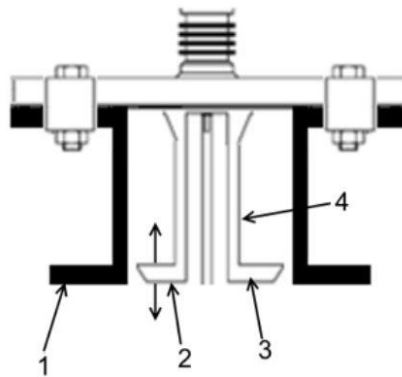


Figure 14 - Oversized nozzle configuration

Threaded mount

Transmitters with threaded process connectors can be screwed to tanks or nozzles with threaded bosses. For tanks with BSP/G threads, place a gasket on top of the tank, or use a sealant on the threads of the tank connection.

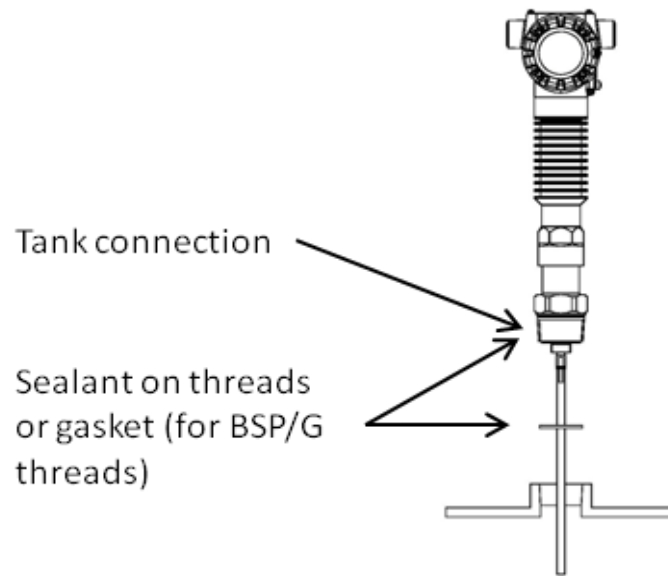


Figure 15 - Threaded tank connection

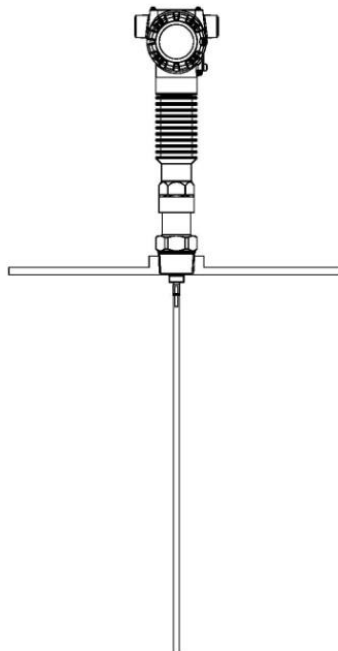


Figure 16 - Tank roof mounting using threaded connection

Mounting on a bypass / bridle

SLG 700 transmitter can be successfully installed in a new or existing bypass pipe, bridle, or a side pipe as shown in Figure 17. This type of installation is often simpler and allows the addition of radar level measurement to an otherwise busy installation.

A similar installation is also possible inside the main container, when installing the SLG 700 transmitter on a stilling well.

N = Inlet diameter

L = Effective measurement range ($\geq 12"/300\text{mm}$)

D = Bypass diameter ($N < D$)

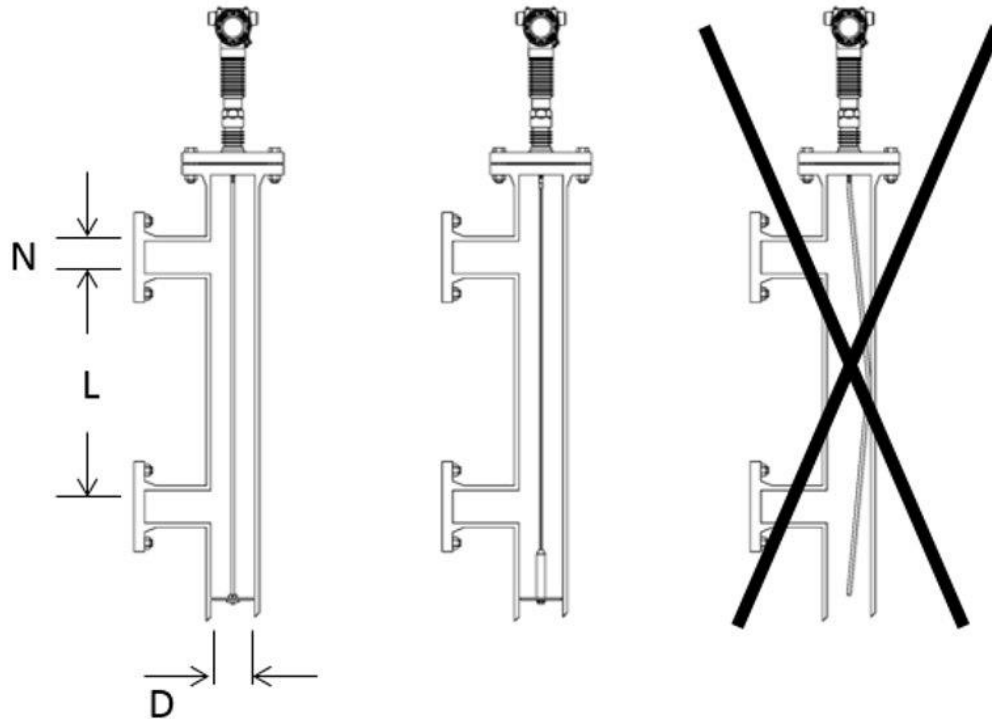


Figure 17 - Bypass installation

Table 6 - SLG720 bypass and stillwell recommended diameters

Probe type	Recommended diameter	Minimum diameter
Rod probe	3" or 4" (75mm or 100mm)	2" (50mm)
Wire probe	4" (100mm)	2" (50mm)
Coaxial probe	N/A	1.5" (37.5mm)

Table 7 - SLG726 bypass and stillwell recommended diameters

Probe type	Recommended diameter	Minimum diameter
Rod probe	3" or 4" (75mm or 100mm)	2" (50mm)
Wire probe	4" (100mm)	2" (50mm)
Coaxial probe	N/A	2" (50mm)

Chambers with smaller diameter can lead to problems with build-up. Chambers larger than 6" (150mm) can be used, but offer little advantage for radar measurement.

The probe must extend the full length of the chamber and not contact the bottom of the chamber, or make contact with the chamber wall.

Clearance from the bottom of the chamber is recommended to be 1" (25mm). Probe selection is dependent on length.

For lengths less than 20' 8" (6.3m): Rod probe is recommended.

For lengths more than 20' 8" (6.3m): Wire probe with weight and centering disk is recommended.

A centering disc is recommended for rigid probes over 1m length to prevent excessive movement caused by strong currents inside the pipe.

Mounting on a non-metallic container

To install a single lead probe into a non-metallic (plastic) vessel, the probe must be mounted with a metal flange (>2"/DN50) or if a threaded process connection is in use, the probe must be screwed into a metal sheet (diameter > 8"/200mm).

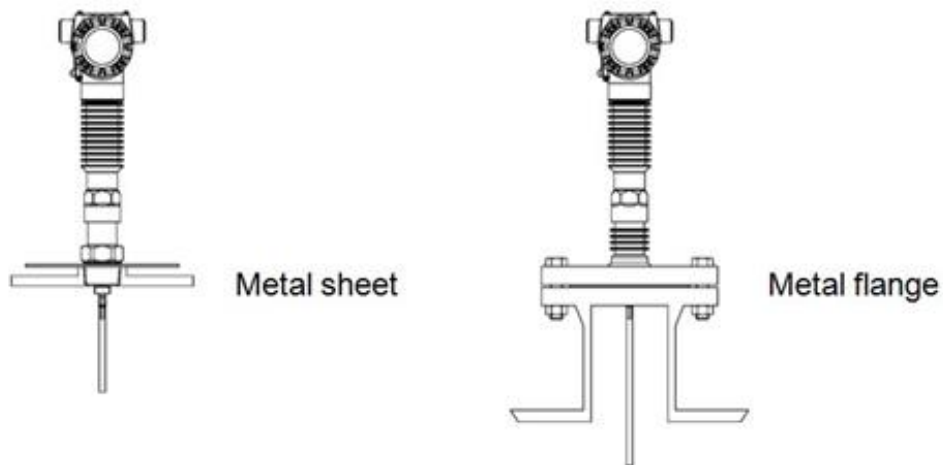


Figure 18 - Mounting on a non-metallic vessel

Figure 19 depicts an example of mounting in concrete silos, the placement of the concrete versus the metal sheet used to secure the transmitter. Both Figure 18 and Figure 19 are considered non-metallic mounts. Both types of mountings are subject to the same specifications.

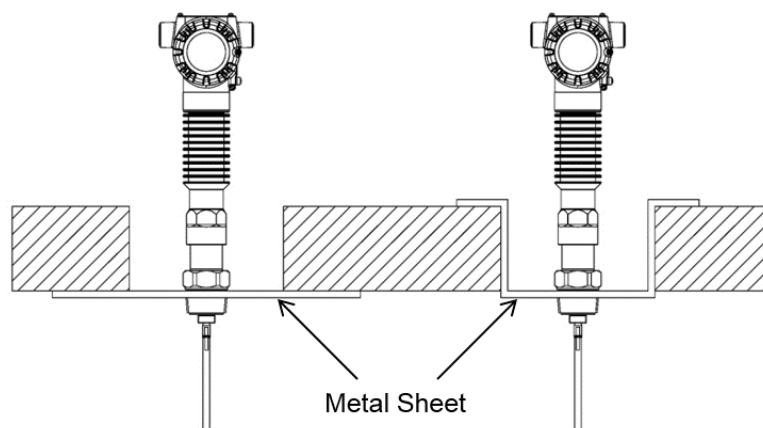


Figure 19 - Mounting in concrete silos

Approval Certifications:

AGENCY MARK (REGION)	TYPE OF PROTECTION	COMM. OPTION	FIELD PARAMETERS
CSA cCSAus (Canada and USA) Certificate # 70016542	Explosion Proof with intrinsically safe probe: Class I, Division 1, Groups A, B, C, D; Class I, Zone 0/1 AEx d[ia] IIC T4 Ga/Gb Ex d[ia] IIC T4 Ga/Gb Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; T4 Class II Zone 21 AEx tb IIIC T95°C DIP A21/II, III /1/EFG/Ex tb IIIC T95°C	All	Note 1
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Class 1 Zone 0 AEx ia IIC T4 Ga Ex ia IIC T4 Ga	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus / FISCO	Note 2b/2c
	Nonincendive with intrinsically safe probe: Class I, Division 2, Groups A, B, C, D; T4 Class I, Zone 0/2 AEx nA[ia] IIC T4 Ga/Gc Ex nA[ia] IIC T4 Ga/Gc	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus / FISCO	Note 1
Enclosure: Type 4X/ IP66/ IP67. Dual Seal in accordance with ANSI/ISA 12.27.01	All	All	
Canadian Registration Number (CRN):		All SLG 700 models are registered in all provinces and territories in Canada.	
FM Approvals™ (USA) Certificate # FM16US0117X	Explosion proof with intrinsically safe probe: Class I, Division 1, Groups A, B, C, D, T4 with Intrinsically safe probe Class 1, Zone 0/1 AEx ia/d IIC Ga/Gb T4 Dust Ignition Proof with intrinsically safe probe: Class II, Division 1, Groups E, F, G, T4 with Intrinsically Safe Probe Zone 21 AEx tb IIIC Db T95 °C Probe : Zone 20 AEx ia IIIC Da T95 °C	All	Note 1
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G, T4 Class I, Zone 0, AEx ia IIC T4 Ga	4-20 mA / HART	Note 2
		FOUNDATION Fieldbus / FISCO	Note 2
	Nonincendive with intrinsically safe probe: Class I, II, III, Division 2, Groups A, B, C, D, F, G, T4 with Intrinsically Safe Probe Class I, Zone 2, AEx nA IIC T4 Gc Class I, Zone 2[0], AEx nA[ia Ga] IIC T4 Gc (Remote version only)	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus / FISCO	Note 1
Enclosure: Type 4X/ IP66/ IP67. Dual Seal in accordance with ANSI/ISA 12.27.01	All	All	

Approval Certifications: (Continued)

<p>ATEX (EU)</p> <p>SIRA Certificate #s 15ATEX2004X 15ATEX4005X</p>	<p>Flameproof with IS probe: 2[1] G Ex d[ia] IIC T4 Gb[Ga] Dust Ignition Proof : II 2 D Ex tb IIIC T 95°C</p>	All	Note 1
	<p>Intrinsically Safe: II 1 G Ex ia IIC T4 Ga</p>	4-20 mA / HART	Note 2a
	<p>Nonincendive with IS probe: 3[1] G Ex nA[ia] IIC t4 Gb[Ga]</p>	FOUNDATION Fieldbus / FISCO	Note 2b/2c
		4-20 mA / HART	Note 1
	<p>Enclosure: IP66/ IP67</p>	FOUNDATION Fieldbus / FISCO	Note 1
<p>IECEX (World)</p> <p>Certificate # SIR 15.0005X</p>	<p>Flameproof with IS probe: Ex d[ia] IIC T4 Gb[Ga] Dust Ignition Proof : Ex tb IIIC T 95°C IP 66</p>	All	Note 1
	<p>Intrinsically Safe: Ex ia IIC T4 Ga</p>	4-20 mA / HART	Note 2a
	<p>Nonincendive with IS probe: Ex nA[ia] IIC T4 Gc[Ga]</p>	FOUNDATION Fieldbus / FISCO	Note 2b/2c
		4-20 mA / HART	Note 1
	<p>Enclosure: IP66/ IP67</p>	FOUNDATION Fieldbus / FISCO	Note 1
<p>CCoE (India) CCEs# P358814/1</p> <p>SAEx (South Africa) Certificate # S-XPL/ 15.0528X</p> <p>KOSHA (Korea) Certificate #s 16-AV4BO-0093X 16-AV4BO-0094X 16-AV4BO-0095X 16-AV4BO-0161X 16-AV4BO-0165X 16-AV4BO-0167X</p> <p>Korea MSIP Registration# MSIP-REI-Ssi- SLG721</p>	<p>Flameproof with IS probe: Ex d[ia] IIC T4 Gb[Ga] Dust Ignition Proof : Ex tb IIIC T95°C Ex tD A21 T95°C (KOSHA)</p>	All	Note 1
	<p>Intrinsically Safe: Ex ia IIC T4 Ga</p>	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus	Note 2b
	<p>Nonincendive with IS probe: Ex nA[ia] IIC T4 Gc[Ga]</p>	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus	Note 1
	<p>Enclosure: IP66/ IP67</p>	All	All
	<p>Intrinsically Safe: Ex ia IIC T4 Ga</p>	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus	Note 2b
	<p>Nonincendive with IS probe: Ex nA[ia] IIC T4 Gc[Ga]</p>	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus	Note 1
<p>Enclosure : IP 66/67</p>	All	All	

NEPSI (China) Certificate # GYJ16.1279X China Pattern Approval #s 2016-L262 2016-L263 2016-L264	Flameproof with IS probe: Ex d ia IIC T4 Ga/Gb Dust Ignition Proof : Ex tb IIIC T95°C	All	Note 1
	Intrinsically Safe: Ex ia IIC T4 Ga	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus	Note 2b
	Nonincendive with IS probe: Ex nA ia IIC T4 Ga/Gc	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus	Note 1
Enclosure : IP 66/67	All	All	
INMETRO (Brazil) Certificate # IEx 16.0072X	Flameproof with IS probe: Ex d[ia Ga] IIC T4 Gb Dust Ignition Proof : Ex tb IIIC T 95°C Db	All	Note 1
	Intrinsically Safe: Ex ia IIC T4 Ga	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus	Note 2b
	Nonincendive with IS probe: Ex nA[ia Ga] IIC T4 Gc	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus	Note 1
Enclosure : IP 66/67	All	All	
EAC TR-CU (Russia) Certificate # TC RU C-US. ГБ08.В.01747	Flameproof with IS probe: 1 Ex db [ia] IIC T4 X Dust Ignition Proof : Ex tb IIIC T95°C X	All	Note 1
	Intrinsically Safe: 0 Ex ia IIC T4 X	4-20 mA / HART	Note 2a
		FOUNDATION Fieldbus	Note 2b
	Nonincendive with IS probe: 2 Ex nAc[ia] IIC T4 X	4-20 mA / HART	Note 1
		FOUNDATION Fieldbus	Note 1
Enclosure : IP 66/67	All	All	

Notes:

1. Non-Intrinsically Safe Operating Voltages:
 - Voltage at terminals = 14.0 to 42.0 Vdc (HART / 4-20mA)
 - = 9.0 to 32.0 Vdc (FOUNDATION Fieldbus)
2. Intrinsically Safe Entity Parameters
 - a. Analog/ HART Entity Values:

V _{max} = U _i = 30 V	I _{max} = I _i = 225 mA	C _i = 4 nF	L _i = 0	P _i =0.9 W
--	--	-----------------------	--------------------	-----------------------
 - b. Foundation Fieldbus- Entity Values

V _{max} = U _i = 30 V	I _{max} = I _i = 225 mA	C _i = 0 nF	L _i = 0	P _i =1.0 W
--	--	-----------------------	--------------------	-----------------------
 - c. Foundation Fieldbus (FISCO)- Entity Values

V _{max} = U _i = 17.5 V	I _{max} = I _i = 380 mA	C _i = 0 nF	L _i = 0	P _i =5.32 W
--	--	-----------------------	--------------------	------------------------

 When Installed as FISCO T_a= -50C to 45C

3. Ambient (Ta) and process temperature ranges are as follows

SLG720			
Intrinsic Safety	Ta=-50°C to +70°C	T4	process temperature = 150°C
Intrinsic Safety	Ta=-50°C to +60°C	T4	process temperature = 200°C
other protection types	Ta=-50°C to +85°C	T4	process temperature = 150°C
other protection types	Ta=-50°C to +60°C	T4	process temperature = 200°C
SLG726			
Intrinsic Safety	Ta=-50°C to +70°C	T4	process temperature = 300°C
Intrinsic Safety	Ta=-50°C to +60°C	T4	process temperature = 450°C
other protection types	Ta=-50°C to +85°C	T4	process temperature = 300°C
other protection types	Ta=-50°C to +60°C	T4	process temperature = 450°C

Overfill Protection	WHG Certificate #: Z-65.16-556. TÜV-tested and approved for overfill protection according to the German WHG regulations
SIL 2/3 Certification	IEC 61508 SIL 2 for non-redundant use and SIL 3 for redundant use according to EXIDA and TÜV Nord Sys Tec GmbH & Co. KG under the following standards: IEC61508-1: 2010; IEC 61508-2: 2010; IEC61508-3: 2010. Note: Only transmitters with SIL markings are certified for SIL applications. – Transmitters ordered with SIL certification will signify the SIL Level on the SLG700 Nameplate.
China Pattern Approval	The SLG 700 is approved according to the Law on Metrology of the People’s Republic of China. China Pattern Approval identification numbers 2016-L262, 2016-L263, and 2016-L264.
Korean KC MSIP Registration	SLG700 transmitters are registered under the clause 3, Article 58-2 of Radio Waves Act. Registration # MSIP-REI-Ssi-SLG720

Mounting & Dimensional Drawings

Reference Dimensions: $\frac{\text{millimeters}}{\text{inches}}$

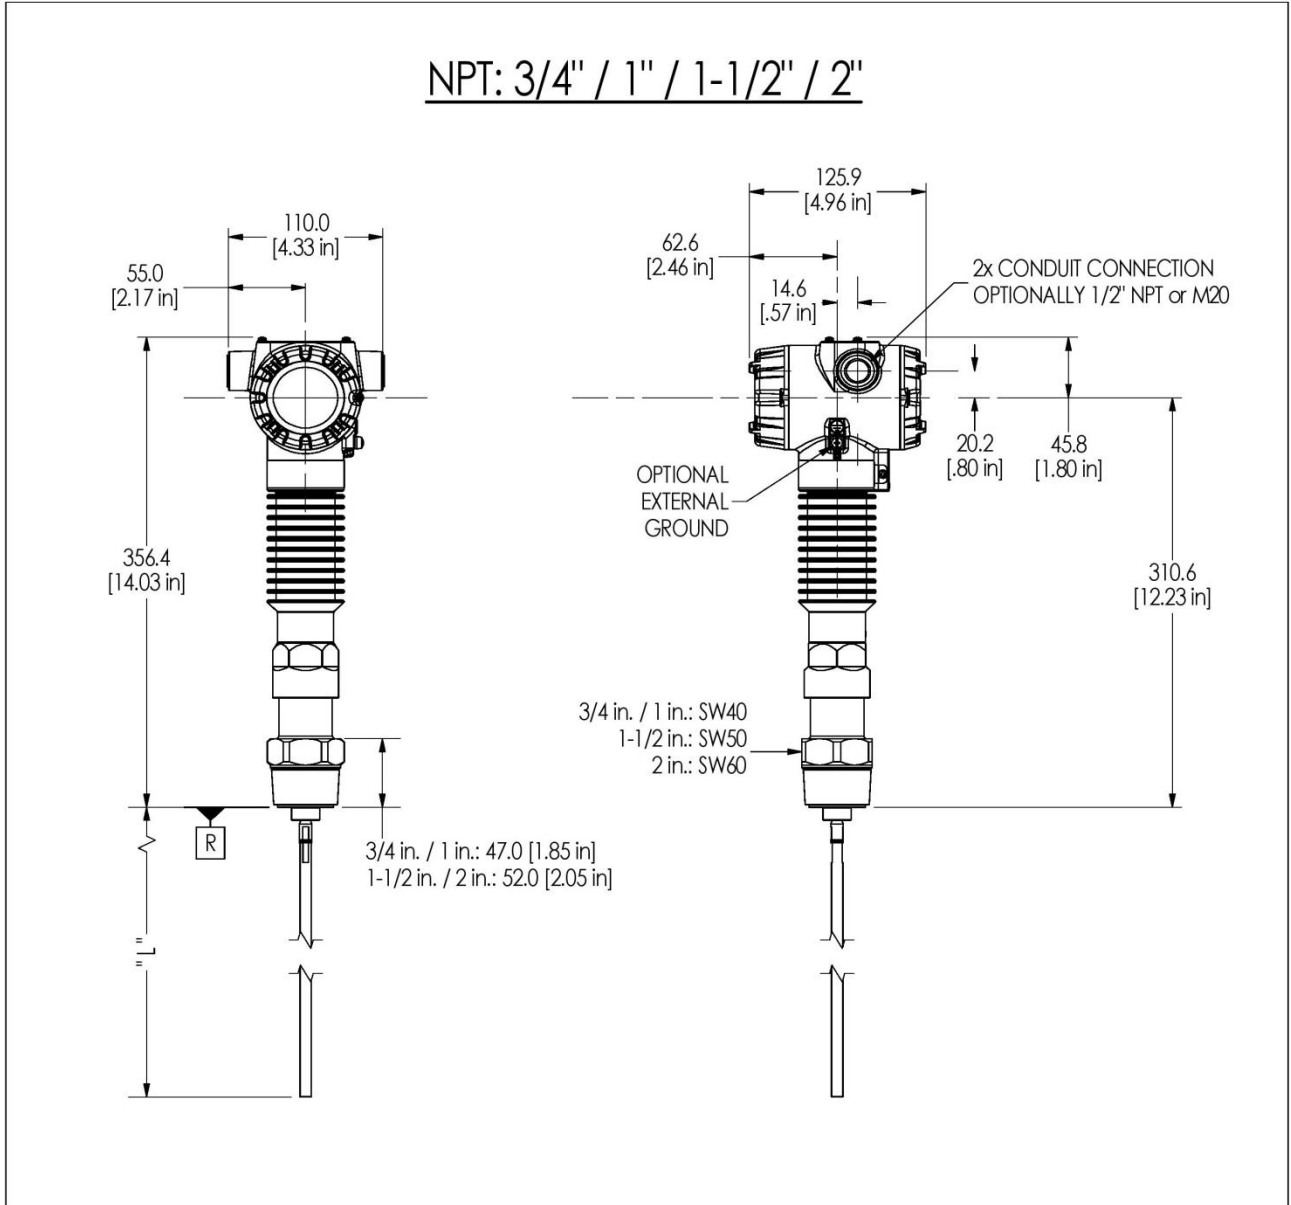


Figure 20 - SLG720 SmartLine Level with NPT fitting

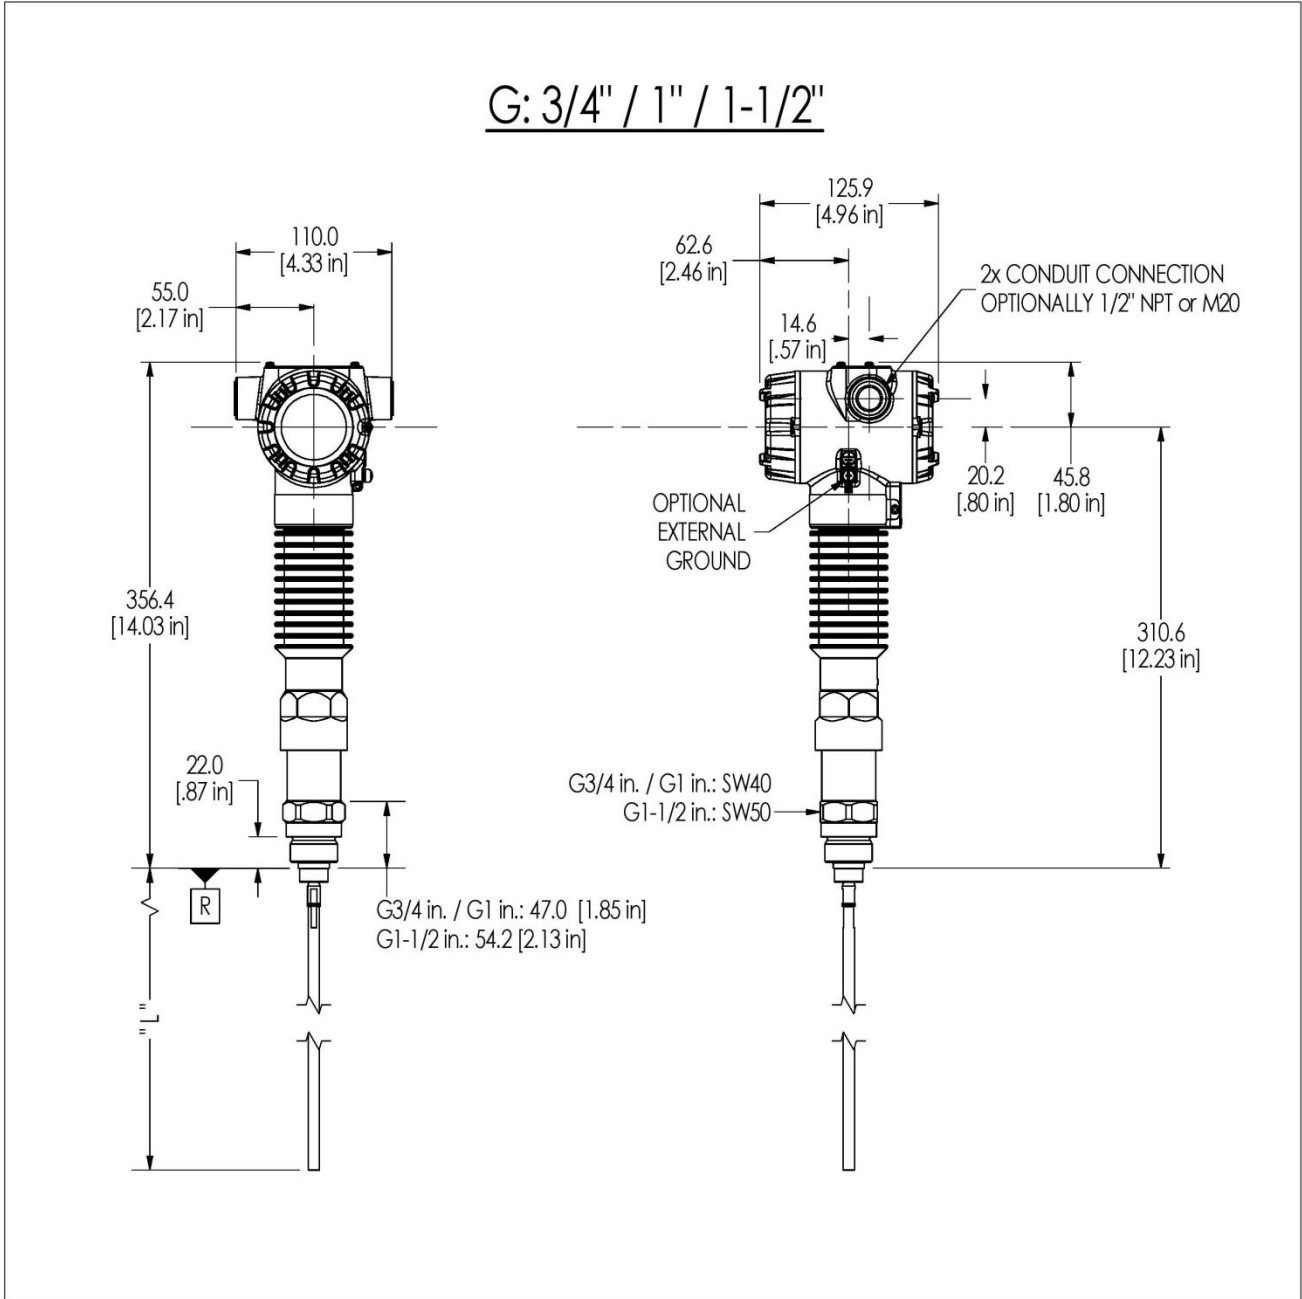


Figure 21 -SLG720 SmartLine Level with BSP (British Standard Pipe) fitting

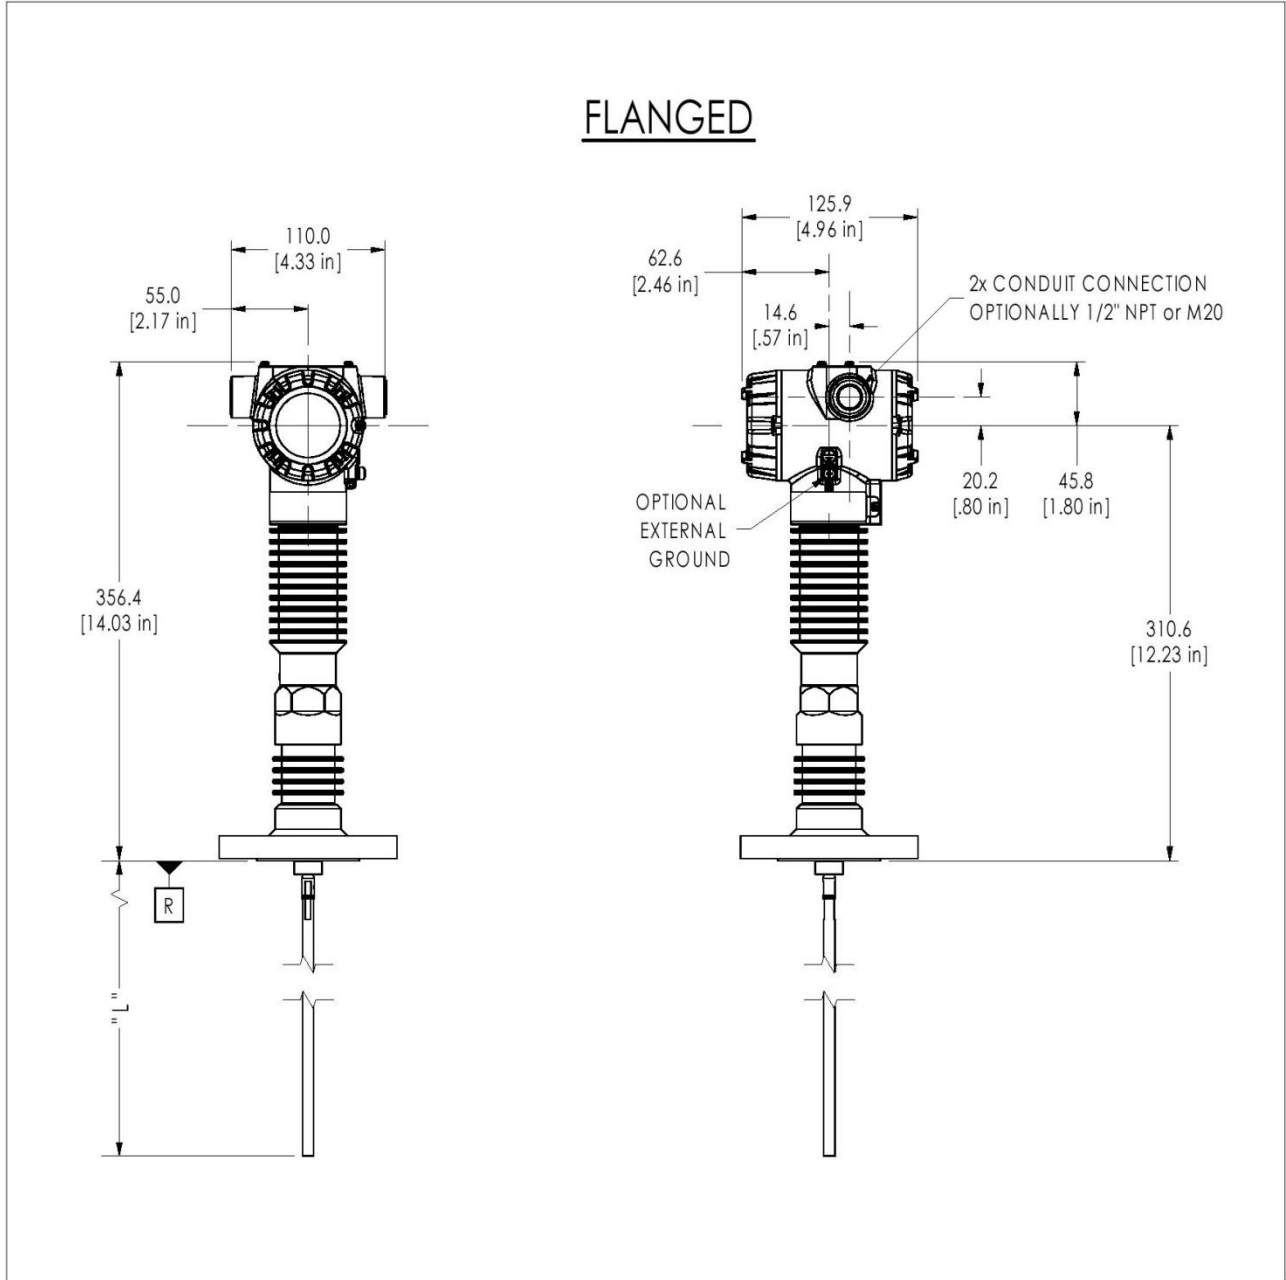


Figure 22 - SLG720 SmartLine Level with Flange

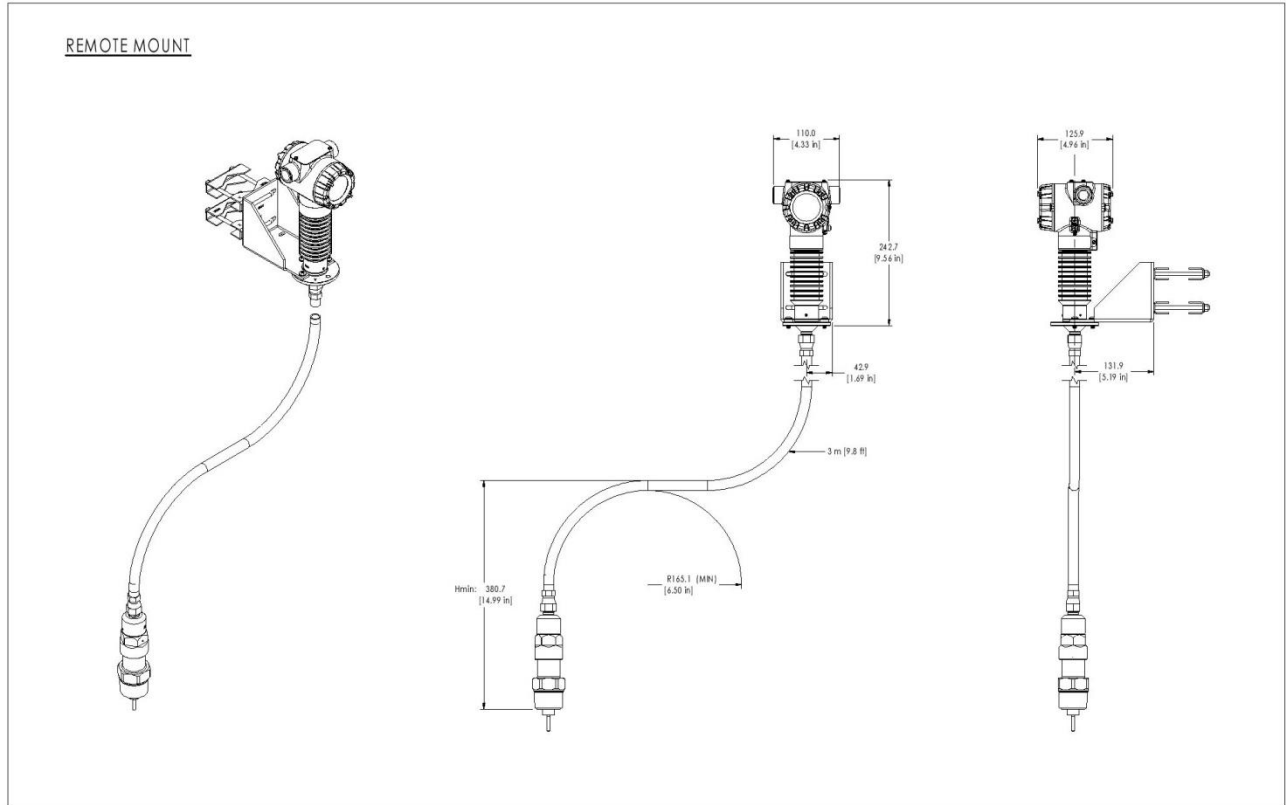


Figure 23 - SmartLine Level with remote housing option (Shown with SLG720)


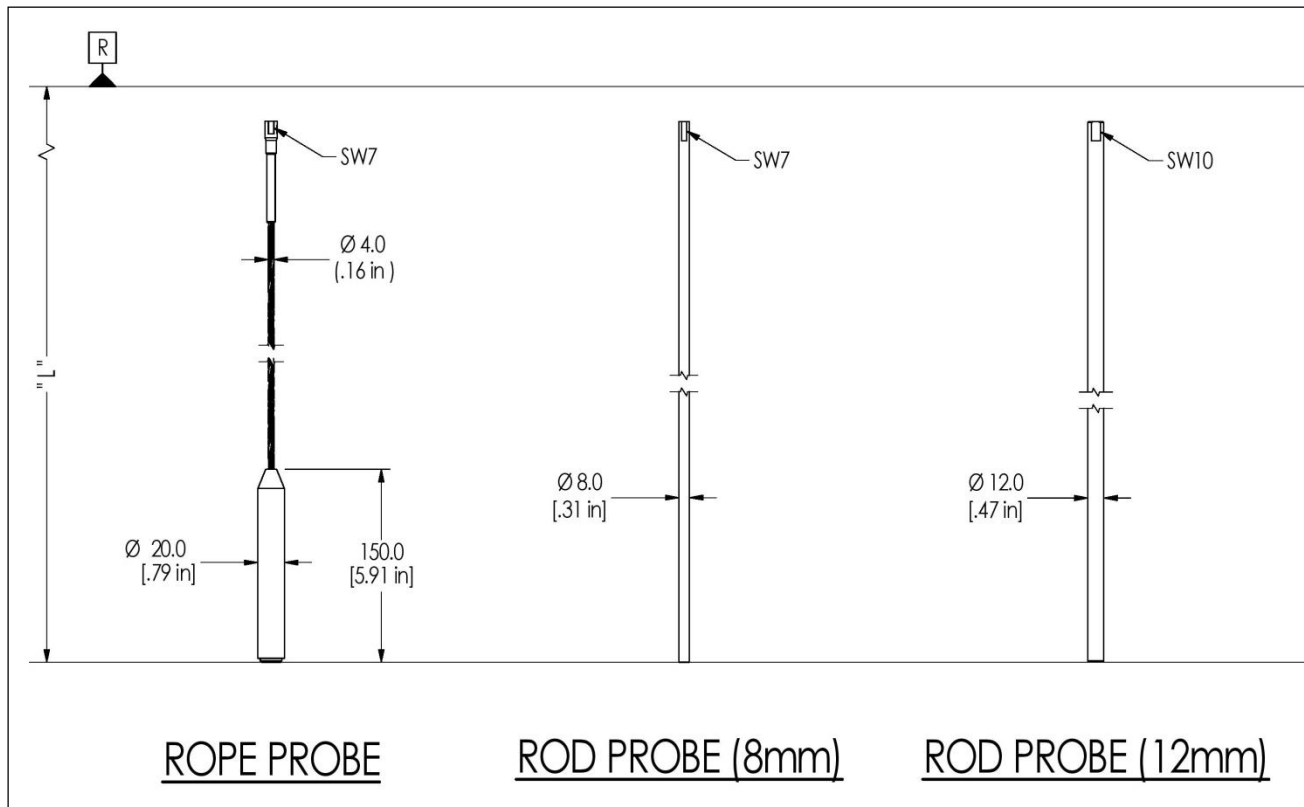


Figure 24 -SLG720 SmartLine Level rod probes

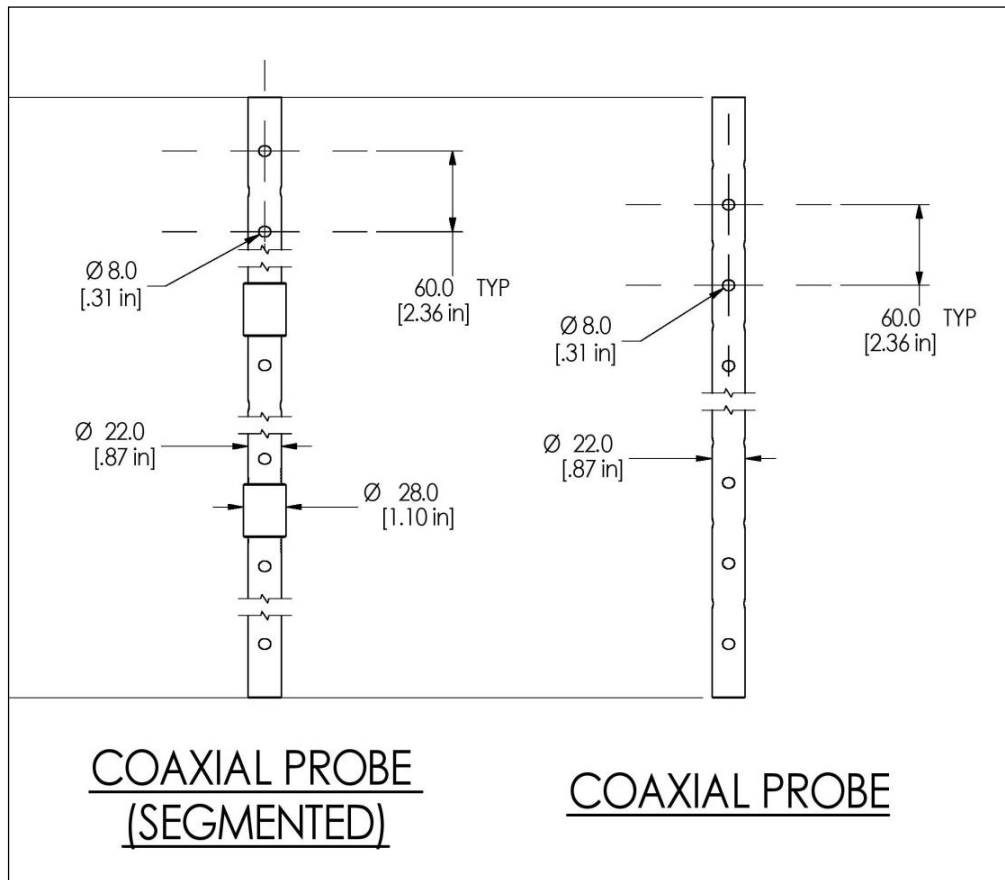

-

Figure 25 - SLG720 SmartLine Level coaxial probes

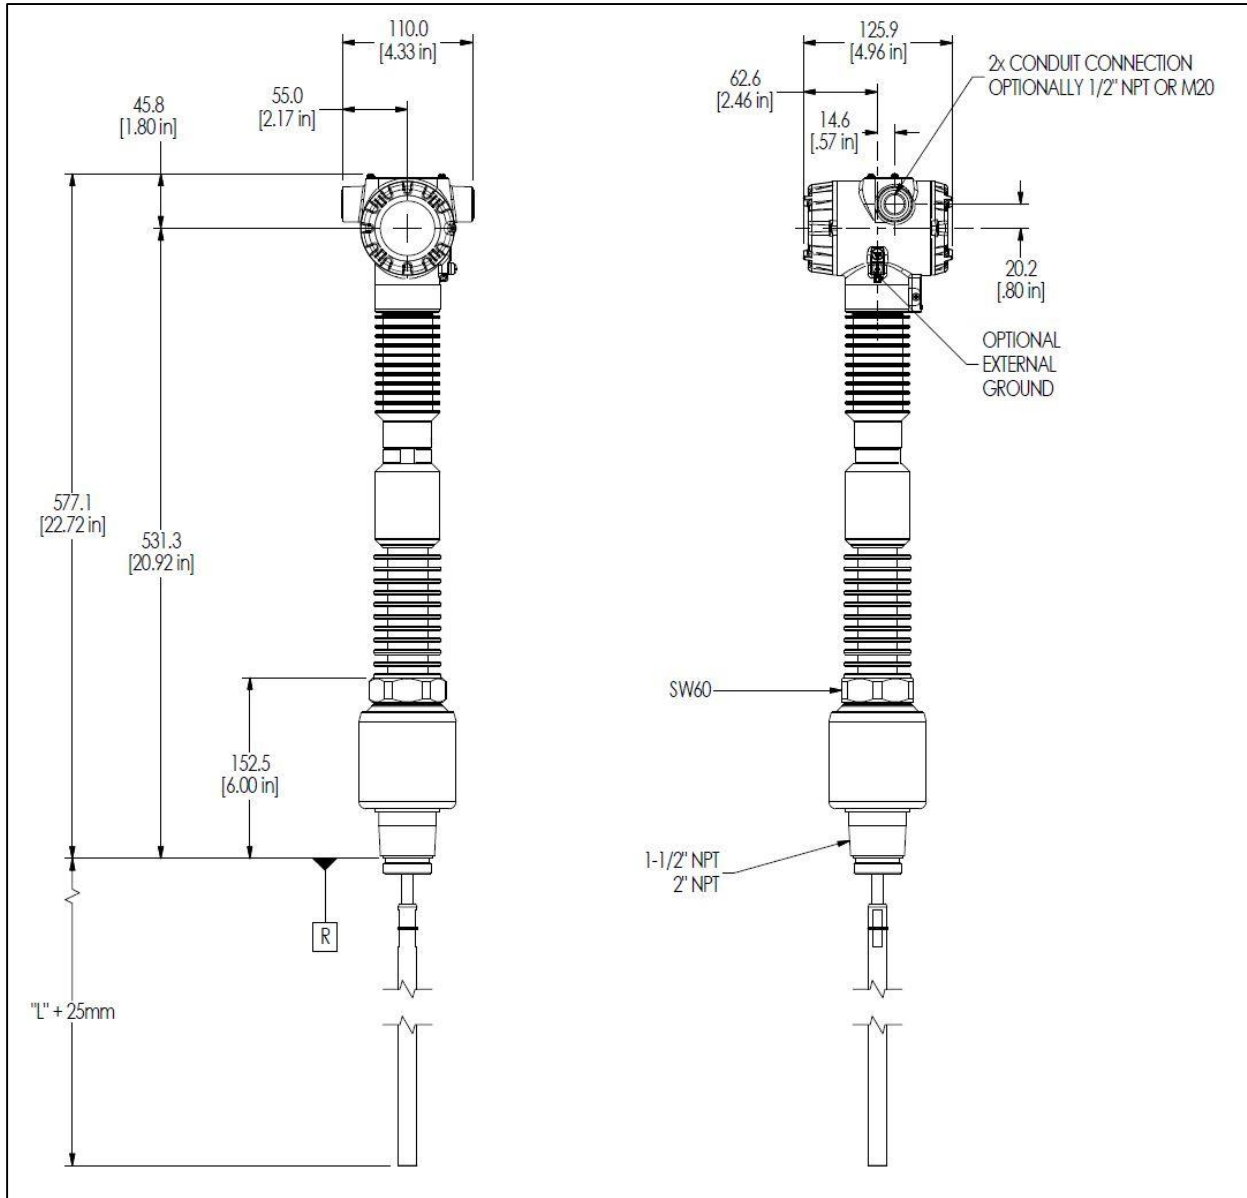


Figure 26 - SLG726 Threaded NPT Mount Transmitter

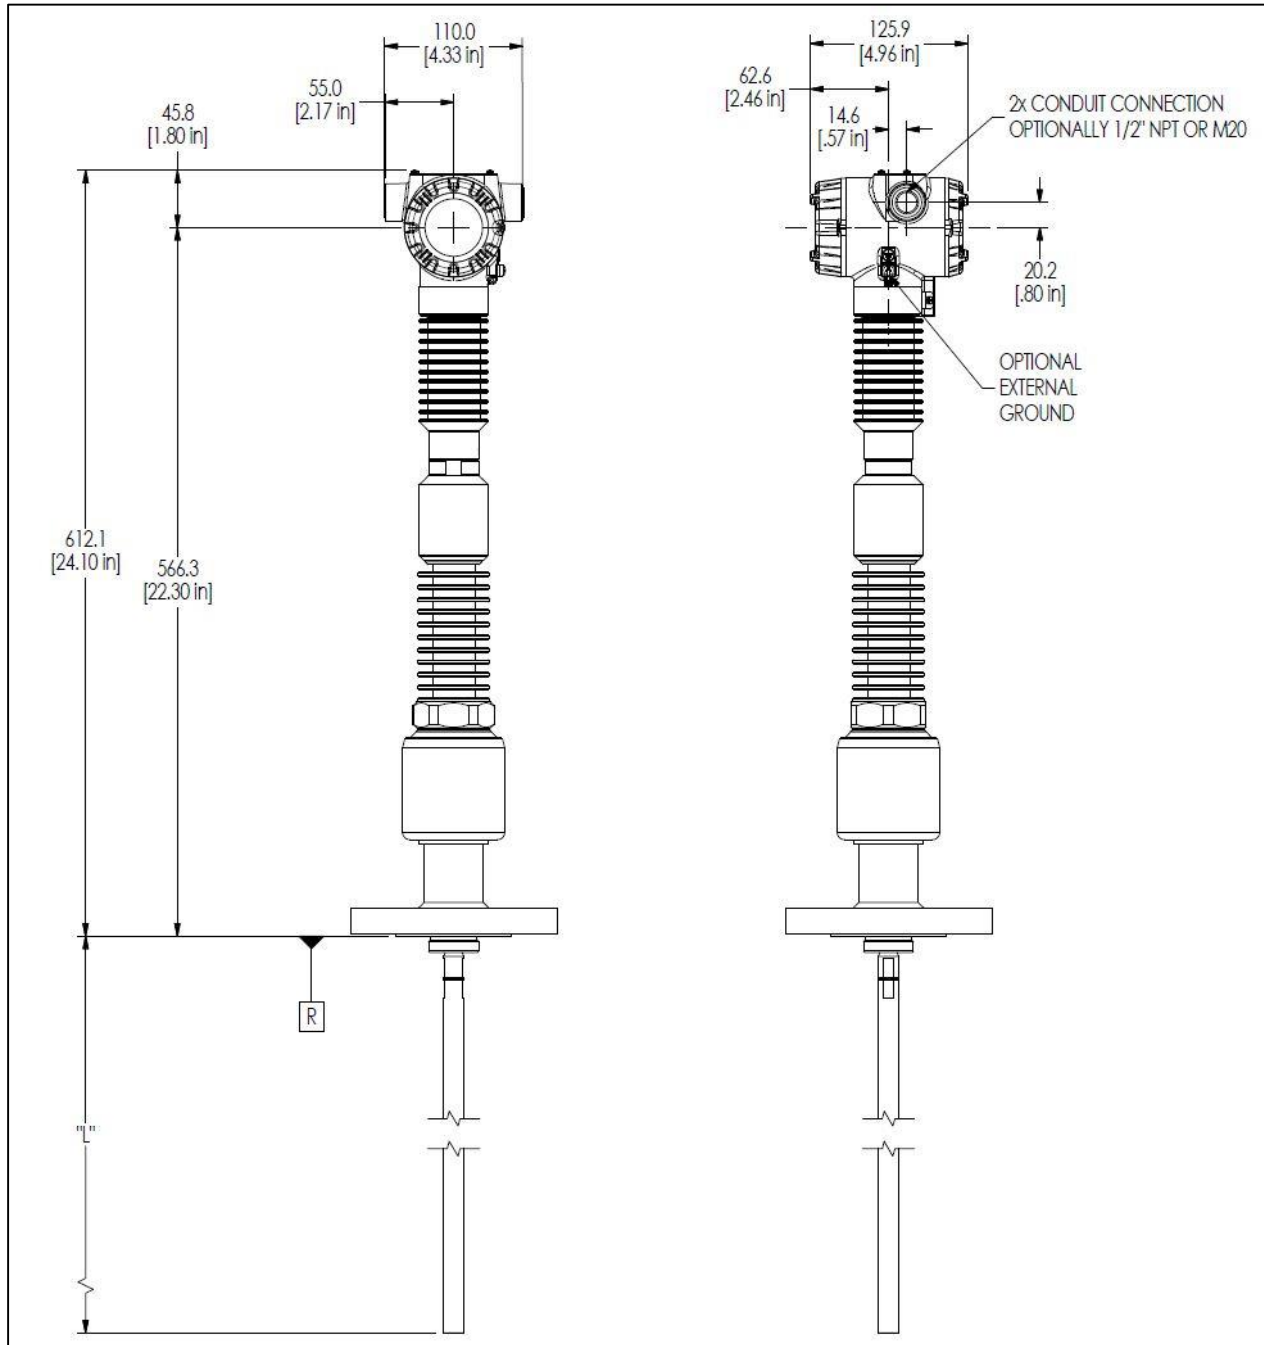


Figure 27 - SLG726 Flange Mount Transmitter

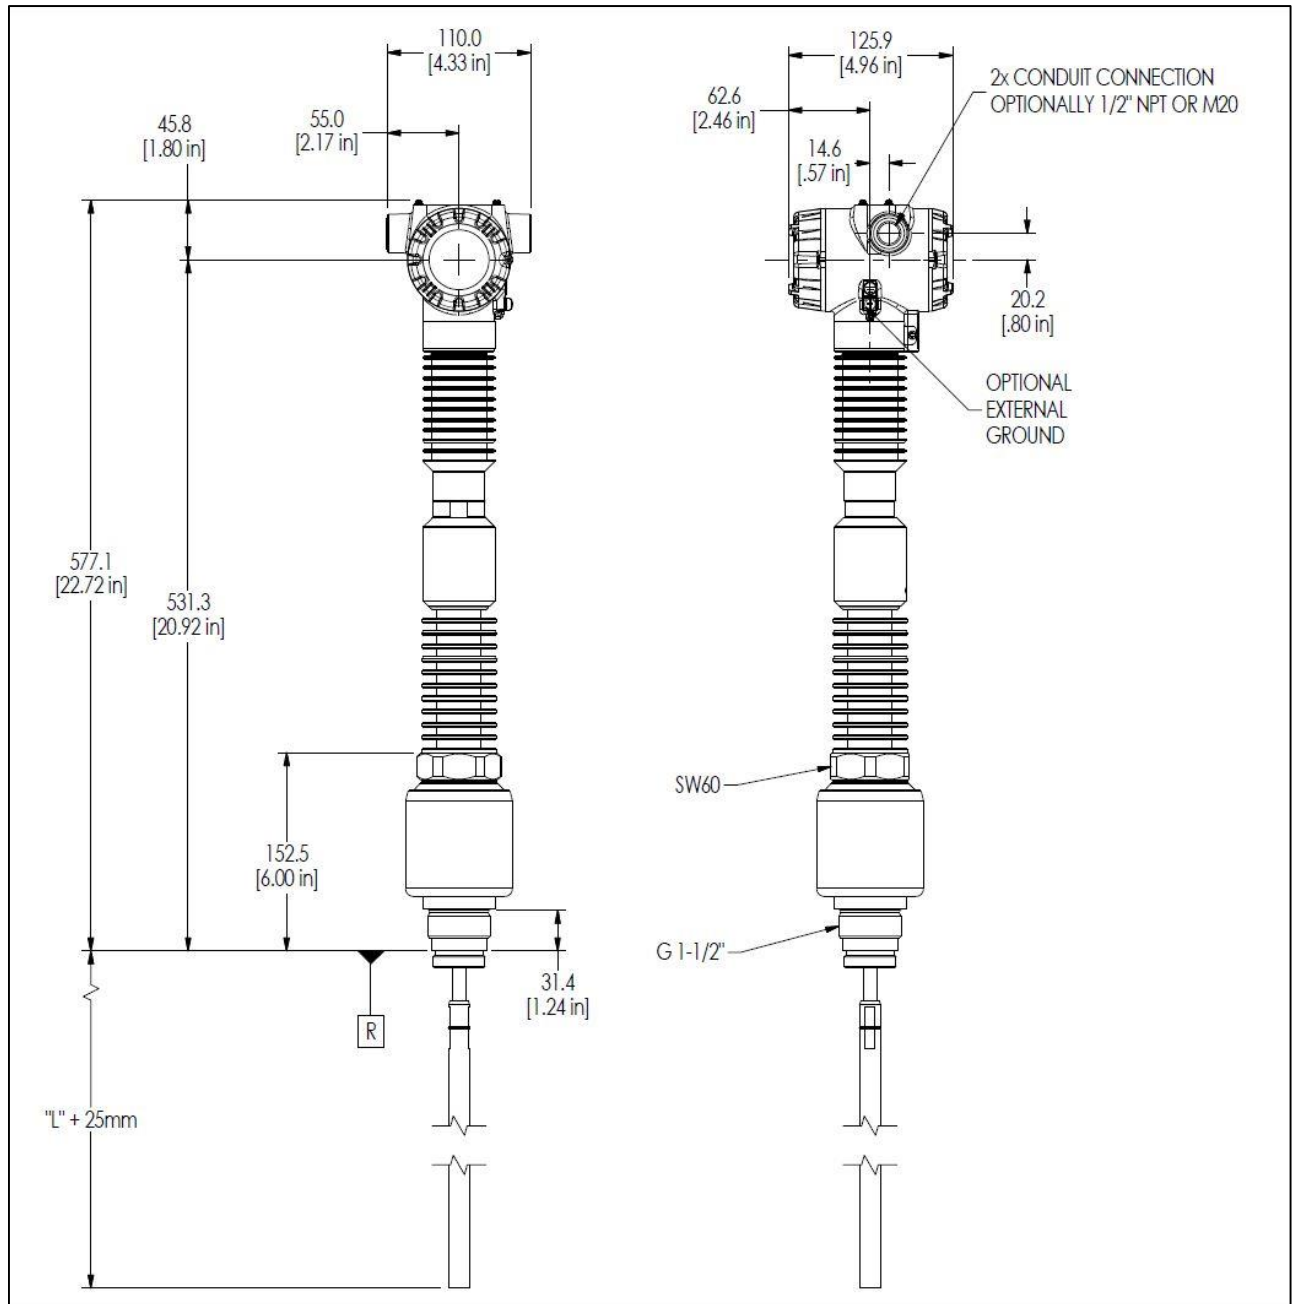


Figure 28 - SLG726 Threaded BSP/G Mount Transmitter

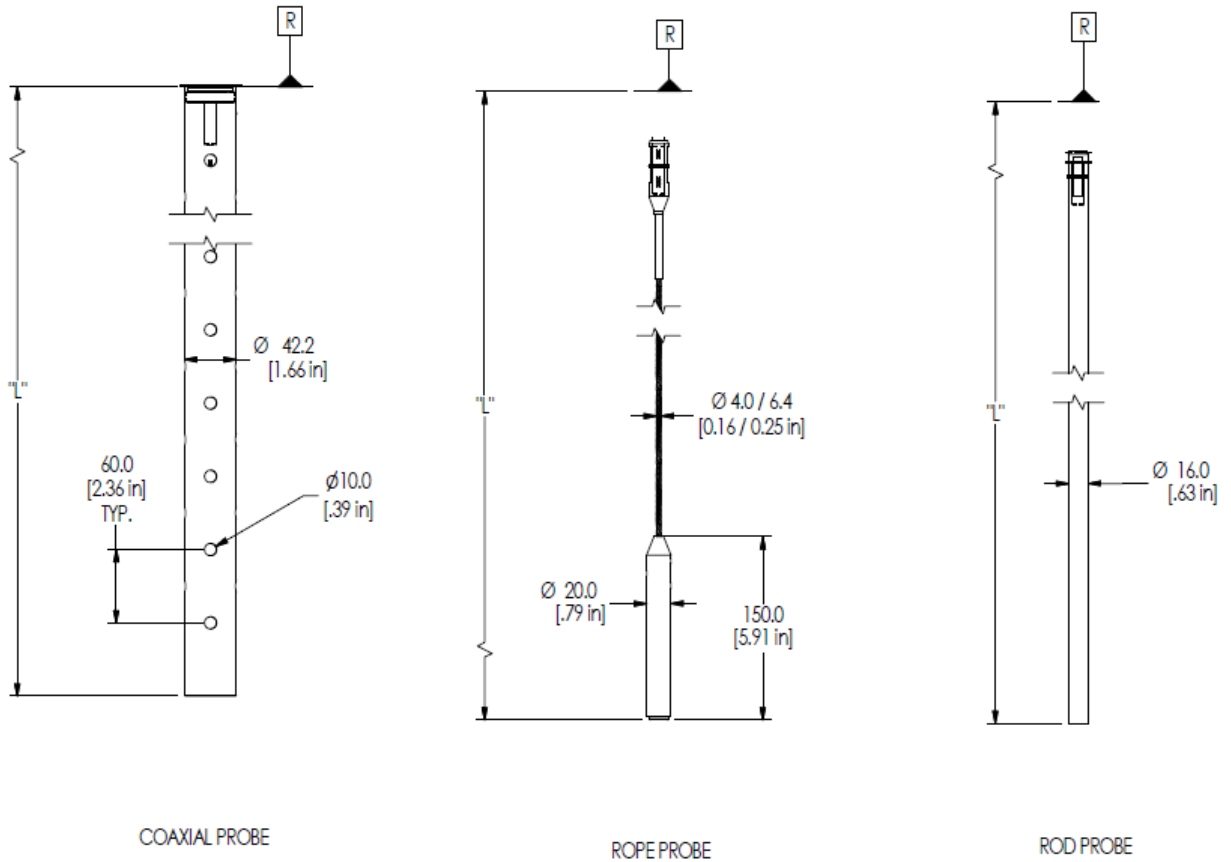


Figure 29 - SLG726 Probes

Model Selection Guides are subject to change and are inserted into the specifications as guidance only. Prior to specifying or ordering a model please check for the latest revision of the Model Selection Guides which are published at: www.honeywellprocess.com/en-US/pages/default.aspx

Model Selection Guide

Model SLG72X Series Liquid Measurement Guided Wave Radar Level Transmitter

Model Selection Guide
34-SL-16-01 Issue 4A

Instructions

- Select the desired Key Number. The arrow to the right marks the selection available.
- Make one selection from each Table (I, II and IX) using the column below the proper arrow.
- A(*) denotes unrestricted availability. A letter denotes restricted availability.
- Restrictions follow Table IX.

Key Number: I II III IV V VI VII VIII (Optional) IX

SLG72 - [] - [] - [] - [] - [] - [] - [] - []

KEY NUMBER	Application	Selection	Availability
	Standard T/P Liquid Level Measurement (-40 to 200C/-1 to 40 bar)	SLG720	↓
	High Temperature/High Pressure Liquid Level Measurement (-60 to 450C/-1 to 400 bar)	SLG726	↓

TABLE I		Probe and Material Selections				Selection	
	Probe Material	Measurement	Probe Type & Dia.	Min/Max Length Meters (Feet)			
a. Wetted materials and probe type	316/316L	General Liquids	None - Customer Supplied (Single Rod and Wire Only)		0 0 0	•	•
			Rod, Single 8 mm dia., segmented, 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRA	a	d
			Rod, Single 12 mm dia., segmented, 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRB	a	
			Rod, Single 16 mm dia., segmented, 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRC		
			Rod, segmented, 8 mm dia, 500 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRH	a	
			Rod, segmented, 8 mm dia, 1000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRJ	a	
			Rod, segmented, 12 mm dia, 500 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRM	a	
			Rod, segmented, 12 mm dia, 1000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRN	a	
			Rod, segmented, 16 mm dia, 500 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRK		d
			Rod segmented, 16 mm dia, 1000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SRL		d
			Wire, Single 4 mm dia	1.0m (3.3 ft) / 50m (164 ft)	SWA	e	e
			Wire, Single 4 mm dia, max 300 mm nozzle height center rod	1.3m (4.3 ft) / 50m (164 ft)	SWB	v	v
	Coaxial (22 mm OD), segmented, 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	SCA	h			
	Coaxial (42 mm OD), segmented, 2000 mm segments (see Note 3 below)	0.4m (1.3 ft) / 6.3m (20.7 ft)	SCB		k		
	Alloy C-276	Liquids	Rod, Single 8 mm dia., segmented, 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	ARA	i	
			Rod, segmented, 8 mm dia., 500 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	ARD	i	
			Rod, segmented, 8 mm dia., 1000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	ARE	i	
			Coaxial (22 mm OD), 2000 mm segments	0.4m (1.3 ft) / 6.3m (20.7 ft)	ACA	i	

TABLE I (con't)		Probe and Material Selections				Selection	
	End Type					20	26
b. Probe End Treatment		None		N	u	u	
		Weight		W	p	p	
c. Centering Disk	316/316L	None		0 0	•	•	
		2" Centering Disk (see Note 2 below)		S 2	q	q	
		3" Centering Disk (see Note 2 below)		S 3	q	q	
		4" Centering Disk (see Note 2 below)		S 4	q	q	
	Alloy C-276	6" Centering Disk (see Note 2 below)		S 6	q	q	
		8" Centering Disk (see Note 2 below)		S 8	q	q	
		2" Centering Disk (see Note 2 below)		A 2	y		
		3" Centering Disk (see Note 2 below)		A 3	y		
d. Seal material	Viton® or Fluorocarbon Elastomer (-26 to 200C) Kalrez perfluorelastomer (-20 to 200C; saturated steam max 150C) EPDM (-40 to 150C) Buna-N (-40 to 120C) Metallic - Alloy 718 NACE Metallic - 17-4 PH			V	•		
				K	•		
				E	•		
				B	•		
				M	•	•	
e. Probe length units	Metric (millimeters)			M	•	•	
f. Probe length	400 mm to 50000 mm (in 100 mm increments) (Probe length 00000 available only with table 1A selection 000.)			XXXXX	•	•	

Note: All flanges are 316L; when coated or C-276 wetted materials are selected a wetted material barrier is provided.
 Note 2: A drilling jig needs to be ordered when ordering centering disk for rod probes. See accessory part numbers for drilling jig part.
 Note 3: For transmitters with threaded process connections and probe lengths over 2000mm, probe will need to be assembled from within the tank.

TABLE II	Connection Types	Material	Size	Rating	Selection	20	26	
Flanges ANSI B16.5 (CRN)	316/316L	316/316L	1-1/2"	Class 150lb RF	AS1A	•		
				Class 300lb RF	AS1B	•		
			2"	Class 150lb RF	AS2A	•	•	
				Class 300lb RF	AS2B	•	•	
				Class 600lb RF	AS2C		•	
				Class 900lb RF	AS2D		•	
				Class 1500lb RF	AS2H		•	
				Class 600lb RTJ	AS2J		•	
				Class 900lb RTJ	AS2K		•	
				Class 1500lb RTJ	AS2L		•	
			3"	Class 150lb RF	AS3A	•	•	
				Class 300lb RF	AS3B	•	•	
				Class 600lb RF	AS3C		•	
				Class 900lb RF	AS3D		•	
				Class 1500lb RF	AS3H		•	
				Class 600lb RTJ	AS3J		•	
	4"	Class 150lb RF	AS4A	•	•			
		Class 300lb RF	AS4B	•	•			
		Class 600lb RF	AS4C		•			
		Class 900lb RF	AS4D		•			
		Class 1500lb RF	AS4H		•			
		Class 600lb RTJ	AS4J		•			
	6"	Class 150lb RF	AS6A	•	•			
		Class 150lb RF	AS8A	•	•			
	C-276	C-276	C-276	1-1/2"	Class 150lb RF	AC1A	•	
				Class 300lb RF	AC1B	•		
				2"	Class 150lb RF	AC2A	•	
	3"	Class 300lb RF	AC2B	•				
Class 150lb RF		AC3A	•					
Class 300lb RF	AC3B	•						
Flanges DIN EN 1092	316/316L	316/316L	DN40	DN40 PN10-40	DS4A	•		
				DN50 PN10/16	DS5A	•	•	
			DN50	DN50 PN25/40	DS5B	•	•	
				DN50 PN63	DS5H		•	
				DN50 PN100	DS5J		•	
				DN50 PN160	DS5K		•	
				DN50 PN250	DS5L		•	
				DN80 PN10/16	DS8A	•	•	
			DN80	DN80 PN25/40	DS8B	•	•	
				DN80 PN63	DS8H		•	
	DN80 PN100	DS8J			•			
	DN80 PN160	DS8K			•			
	DN100	DN80 PN250	DS8L		•			
		DN100 PN10/16	DS1A	•	•			
		DN100 PN25/40	DS1B	•	•			
		DN100 PN63	DS1H		•			
		DN100 PN100	DS1J		•			
		DN100 PN160	DS1K		•			
DN150	DN100 PN250	DS1L		•				
DN150 PN10/16	DS1Y	•	•					
DN200	DN150 PN25/40	DS2A	•	•				
C-276	C-276	C-276	DN40	DN40 PN10/40	DC4C	•		
			DN50	DN50 PN10/16	DC5A	•		
			DN50 PN25/40	DC5B	•			
			DN80	DN80 PN10/16	DC8A	•		
			DN80 PN25/40	DC8B	•			
			DN100	DN100 PN10/16	DC1A	•		
DN100 PN25/40	DC1B	•						
Flanges Special	316/316L	316/316L	Fisher 249B/259B	600lb	FS1C	•	•	
			Fisher 249C	600lb	FS1D	•	•	
			Masonellan 7-1/2"	600 psi	MS1C	•	•	
Threaded Fittings ISO228 and ANS	316/316L	316/316L	316/316L	3/4" NPT (CRN)	NS7A	•		
				1" NPT (CRN)	NS1A	•		
				1 - 1/2" NPT (CRN)	NS5A	•	•	
				2" NPT (CRN)	NS2A	•		
				3/4" BSP (G 3/4")	GS7A	•		
				1" BSP (G 1")	GS1A	•		
	C-276	C-276	C-276	C-276	1-1/2" BSP/G 1-1/2"	GS5A	•	•
					3/4" NPT (CRN)	NC7A	•	
					1" NPT (CRN)	NC1A	•	
					1 - 1/2" NPT (CRN)	NC5A	•	
					2" NPT (CRN)	NC2A	•	
					3/4" BSP (G 3/4")	GC7A	•	
1" BSP (G 1")	GC1A	•						
1-1/2" BSP/G 1-1/2"	GC5A	•						

TABLE III		Agency Approvals (see data sheet for Approval Code Details)	Selection	20	26
Approvals	No Explosion Protection Approvals Required		0	•	•
	FM Explosion/Flame proof, Intrinsically Safe, Non-Incendive/Sparking, & Dust Ignition Proof		A	•	•
	CSA (Canada & USA) Explosion/Flame proof, Intrinsically Safe, Non-Incendive/Sparking, & Dust Ignition Proof		B	•	•
	ATEX Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		C	•	•
	IECEx Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		D	•	•
	SAEx Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		E	•	•
	INMETRO Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		F	•	•
	NEPSI Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		G	•	•
	CCoE Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		H	•	•
	KOSHA Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		K	•	•
	EAC TR-CU Flameproof, Intrinsically Safe, Non-Sparking, & Dust Ignition Proof		L	•	•

TABLE IV		TRANSMITTER ELECTRONICS SELECTIONS			Selection	20	26
a. Electronic Housing Material & Connection Type	Material	Connection	Lightning Protection				
	Polyester Powder Coated Aluminum	1/2 NPT	None	A	•	•	
	Polyester Powder Coated Aluminum	M20	None	B	•	•	
	Polyester Powder Coated Aluminum	1/2 NPT	Yes	C	•	•	
	Polyester Powder Coated Aluminum	M20	Yes	D	•	•	
	316 Stainless Steel (Grade CF8M)	1/2 NPT	None	E	•	•	
	316 Stainless Steel (Grade CF8M)	M20	None	F	•	•	
	316 Stainless Steel (Grade CF8M)	1/2 NPT	Yes	G	•	•	
	316 Stainless Steel (Grade CF8M)	M20	Yes	H	•	•	
	Remote 3m - Polyester Powder Coated Aluminum	1/2 NPT	None	J	•	•	
	Remote 3m - Polyester Powder Coated Aluminum	M20	None	K	•	•	
	Remote 3m - Polyester Powder Coated Aluminum	1/2 NPT	Yes	L	•	•	
	Remote 3m - Polyester Powder Coated Aluminum	M20	Yes	M	•	•	
b. Output/ Protocol	Analog Output		Digital Protocol				
	4-20mA dc n/a		HART Protocol Foundation Fieldbus	_H_ _F_	• •	• •	
c. Customer Interface Selections	Indicator	Ext Zero, Span & Config Buttons	Languages				
	None	None	None	_0	•	•	
	None	Yes (Zero/Span Only)	None	_A	f	f	
	Advanced	None	EN, DE, IT, FR, SP, RU, TU	_D	•	•	
	Advanced	Yes	EN, DE, IT, FR, SP, RU, TU	_E	•	•	
	Advanced	None	EN, CH, JP	_H	•	•	
Advanced	Yes	EN, CH, JP	_J	•	•		

TABLE V		CONFIGURATION SELECTIONS			Selection	20	26
a. Diagnostics	Diagnostics						
	Standard Diagnostics			1	•	•	
b. Interface Measurement	Interface Options						
	None - Standard Level			_0	•	•	
	Interface Measurement			_1	•	•	
c. Compensations	Flooded Interface Measurement			_2	•	•	
	None			_0	•	•	
d. Output Limit, Failsafe & Write Protect Settings	Write Protect	Fail Mode	High & Low Output Limits ¹				
	Disabled	High> 21.0mAdc	Honeywell Std (3.8 - 20.8 mAdc)	_1	f	f	
	Disabled	Low< 3.6mAdc	Honeywell Std (3.8 - 20.8 mAdc)	_2	f	f	
	Enabled	High> 21.0mAdc	Honeywell Std (3.8 - 20.8 mAdc)	_3	f	f	
	Enabled	Low< 3.6mAdc	Honeywell Std (3.8 - 20.8 mAdc)	_4	f	f	
	Enabled	N/A	N/A Fieldbus or Profibus	_5	g	g	
e. General Configuration	Disabled			_6	g	g	
	Factory Standard			_S	•	•	
Custom Configuration (Unit Data Required from customer)			_C	•	•		

¹ NAMUR Output Limits 3.8 - 20.5mAdc can be configured by the customer.

TABLE VI		CALIBRATION & ACCURACY SELECTIONS			Selection	20	26
Accuracy and Calibration	Accuracy	Calibrated Range	Calibration Qty				
	Std Accuracy (+/-3mm or +/-0.03%)	Factory Std (uses RF cable calibrator)	Single Range	A	•	•	
	Std Accuracy (+/-3mm or +/-0.03%)	Custom calibration w/ certificate (Unit Data)	Single Range	B	t	t	

TABLE VII		ACCESSORY SELECTIONS			Selection	20	26
a. Customer Tag	No customer tag			0	•	•	
	One Wired Stainless Steel Tag (Up to 4 lines 26 char/line)			1	•	•	
	Two Wired Stainless Steel Tag (Up to 4 lines 26 char/line)			2	•	•	
b. Unassembled Conduit Plugs & Adapters	No Conduit Plugs or Adapters Required			_A0	•	•	
	1/2 NPT Male to 3/4 NPT Female 316 SS Certified Conduit Adapter			_A2	n	n	
	1/2 NPT 316 SS Certified Conduit Plug			_A6	n	n	
	M20 316 SS Certified Conduit Plug			_A7	m	m	
	Minifast [®] 4 pin (1/2 NPT)			_A8	n	n	
	Minifast [®] 4 pin (M20)			_A9	m	m	

TABLE VIII		OTHER Certifications & Options: (String in sequence comma delimited (XX, XX, XX,...))			Selection	20	26
Certifications & Warranty	None			00	•	•	
	NACE MR0175; MR0103; ISO15156 Process wetted, pressure retaining parts only			FG	•	•	
	EN10204 Type 3.1 Material Traceability, pressure retaining parts			FX	•	•	
	Certificate of Conformance			F3	•	•	
	Calibration Test Report & Certificate of Conformance			F1	•	•	
	Certificate of Origin			F5	•	•	
	FMEDA (SIL 2/3) Certification			FE	j	j	
	WHG Overfill Protection			WG	•	•	
	PMI Certification			PM	•	•	
	Extended Warranty Additional 1 year			01	•	•	
	Extended Warranty Additional 2 years			02	•	•	
	Extended Warranty Additional 3 years			03	•	•	
	Extended Warranty Additional 4 years			04	•	•	

TABLE IX		MANUFACTURING SPECIALS			Selection	20	26
Factory	Application and Validation Tool (AVT) Configuration File Reference #						
	Factory Default Configuration, No AVT File			00000	•	•	

MODEL RESTRICTIONS

Restriction Letter	Available Only with		Not Available with	
	Table	Selection(s)	Table	Selection(s)
a	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)		
	II	_ S _ _		
b	Select only one option from this group			
c	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)	II	NS7A, NS1A, GS7A, GS1A
	II	_ S _ _		
d	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)		
e	if	probe length 1000 mm to 50000 mm (_ 1000 to _ 50000)		
	II	_ S _ _		
f			IVb	_ F _
g	IVb	_ F _		
h	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)	II	NS7A, GS7A
	II	_ S _ _	if	probe length > 2000 mm
i	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)	II	NC7A, GC7A
	II	_ C _ _	if	probe length > 2000 mm
j	IVb	_ H _	Vd	_ _ 1 _ _ 2 _ _ 6 _
k	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)	II	NS7A, NS1A, NS2A, GS1A, GS7A
l	if	probe length 400 mm to 6300 mm (_ 400 to _ 6300)		
	II	_ C _ _		
m	IVa	B _ , D _ , F _ , H _ , K _ , M _		
n	IVa	A _ , C _ , E _ , G _ , J _ , L _		
p	1a	SWA _ _ _ _ _ , SWB _ _ _ _ _		
		SWAW _ _ _ _ _ , SWBW _ _ _ _ _ , SRA _ _ _ _ _ , SRB _ _ _ _ _ , SRH _ _ _ _ _ , SRJ _ _ _ _ _ , SRM _ _ _ _ _ , SRN _ _ _ _ _ , SRK _ _ _ _ _ , SRL _ _ _ _ _ , SRC _ _ _ _ _		
q	1a,1b	probe length 1000 mm to 50000 mm (_ 1000 to _ 50000)		
	if	probe length 1000 mm to 50000 mm (_ 1000 to _ 50000)	II	NS7A, NS1A, GS7A, GS1A
r	II	_ S _ _		
			1a	SWA _ _ _ _ _ , SWB _ _ _ _ _
t			if	probe lengths more than 20 meters (> _ _ _ _ _ 20000)
u			1a	SWA _ _ _ _ _ , SWB _ _ _ _ _
v	if	probe length 1300 mm to 50000 mm (_ 1300 to _ 50000)		
	II	_ S _ _		
y	1a	ARA _ _ _ _ _ , ARD _ _ _ _ _ , ARE _ _ _ _ _		

ACCESSORIES

Description	Part Number
SmartLine Anytime Tool (for firmware upgrade)	50127238-501
SmartLine Level Drilling Jig for Rod Probes, reusable	51000000-502

FIELD INSTALLABLE REPLACEMENT PARTS

Description	Kit Number
GWR Level Basic Indicator Kit	50096657-501
GWR Level Advanced Indicator Kit	50096657-502
GWR Level Terminator Module w/Lightning Protection Kit for HART Modules	50095191-502
GWR Level Terminator Module w/Lightning Protection Kit for FF Modules	50095191-510
GWR Level Terminator Module w/o Lightning Protection Kit for HART Modules	50095191-501
GWR Level Terminator Module w/o Lightning Protection Kit for FF Modules	50095191-509
GWR Level HART Electronics module w/o connection for external configuration button	50096656-501
GWR Level HART Electronics module w/connection for external configuration button	50096656-502
GWR Level FF Electronics module w/o connection for external configuration button	50096656-503
GWR Level FF Electronics module w/connection for external configuration button	50096656-504
GWR Level Spare sensor module	50096711-501

HART® is a registered trademark of HART Communication Foundation.

FOUNDATION™ Fieldbus is a trademark of Fieldbus Foundation.

Viton® is a registered trademark of DuPont Performance Elastomers.

Teflon® is a registered trademark of DuPont.

FM ApprovalsSM is a service mark of FM Global

Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

ASIA PACIFIC

Honeywell Process Solutions,
(TAC) hfs-tac-support@honeywell.com

Australia

Honeywell Limited
Phone: +(61) 7-3846 1255
FAX: +(61) 7-3840 6481
Toll Free 1300-36-39-36
Toll Free Fax:
1300-36-04-70

China – PRC - Shanghai

Honeywell China Inc.
Phone: (86-21) 5257-4568
Fax: (86-21) 6237-2826

Singapore

Honeywell Pte Ltd.
Phone: +(65) 6580 3278
Fax: +(65) 6445-3033

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799 6114
Fax: +(822) 792 9015

EMEA

Honeywell Process Solutions,
Phone: + 80012026455 or
+44 (0)1344 656000

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

AMERICAS

Honeywell Process Solutions,
Phone: (TAC) 1-800-423-9883 or
215/641-3610
(Sales) 1-800-343-0228

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

Specifications are subject to change without notice.

For more information

To learn more about SmartLine Transmitters,
visit www.honeywellprocess.com
Or contact your Honeywell Account Manager

Process Solutions

Honeywell
1250 W Sam Houston Pkwy S
Houston, TX 77042

Honeywell Control Systems Ltd
Honeywell House, Skimped Hill Lane
Bracknell, England, RG12 1EB

Shanghai City Centre, 100 Jungi Road
Shanghai, China 20061

www.honeywellprocess.com



34-SL-03-03

December 2016

©2016 Honeywell International Inc.